
SZCJ

Shenzhen Changji Semiconductor Co., LTD.

SOT-523 Plastic-Encapsulate Diodes







BAW56T/BAV70T/BAV99T SWITCHING DIODE

SOT-523



FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance

BAW56T	BAV70T	BAV99T
		
MARKING:JD	**MARKING:JJ**	**MARKING:JE**
		


Maximum Ratings @Ta=25℃


Parameter	Symbol	Limit	Unit
Reverse Voltage	V_R	85	V
Forward Current	I_F	75	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	I_{FSM}	2.0	A
Power Dissipation	P_D	150	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	833	℃/W
Operation Junction and Storage Temperature Range	T_J,T_{STG}	-55~+150	℃


ELECTRICAL CHARACTERISTICS (Ta=25℃ unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	I_R= 1μA	85		V
Reverse voltage leakage current	I_{R1}	V_R=75V		2	μA
	I_{R2}	V_R=25V		0.03	μA
Forward voltage	V_F	I_F=1mA I_F=10mA I_F=50mA I_F=150mA		715 855 1000 1250	mV
Diode capacitance	C_D	V_R=0 f=1MHz		1.5	pF
Reverse recovery time	t_{rr}	I_F=I_R=10mA I_{rr}=0.1×I_R,R_L=100Ω		4	ns

Typical Characteristics

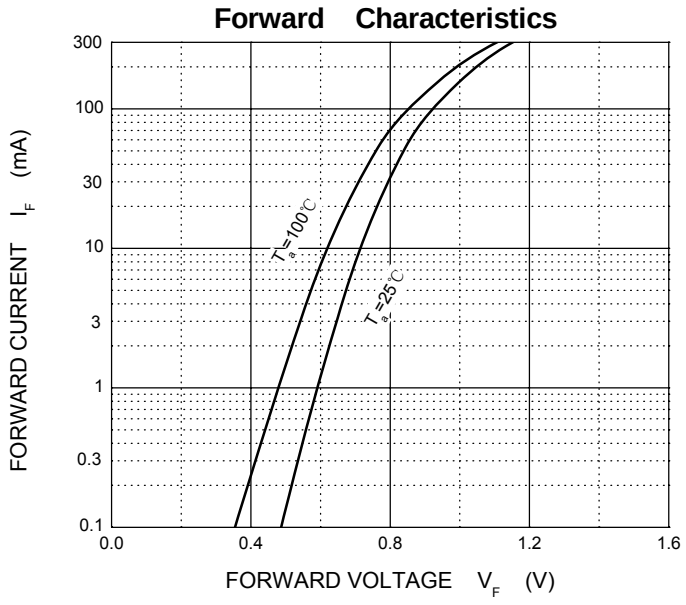


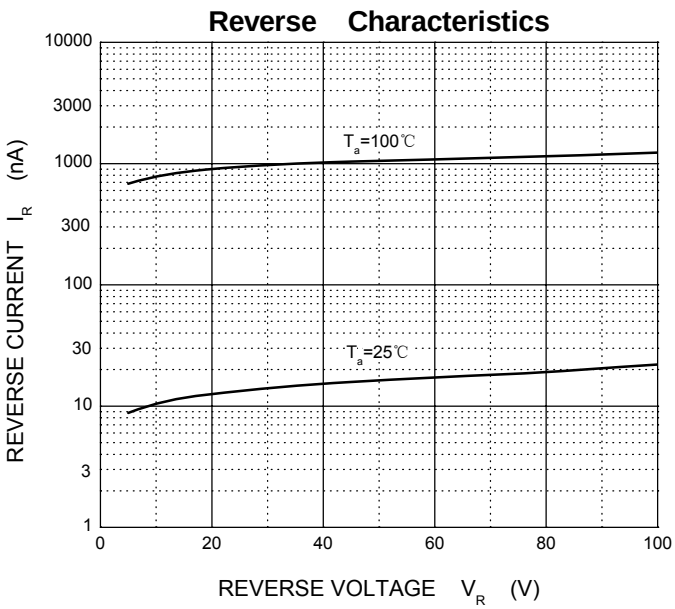


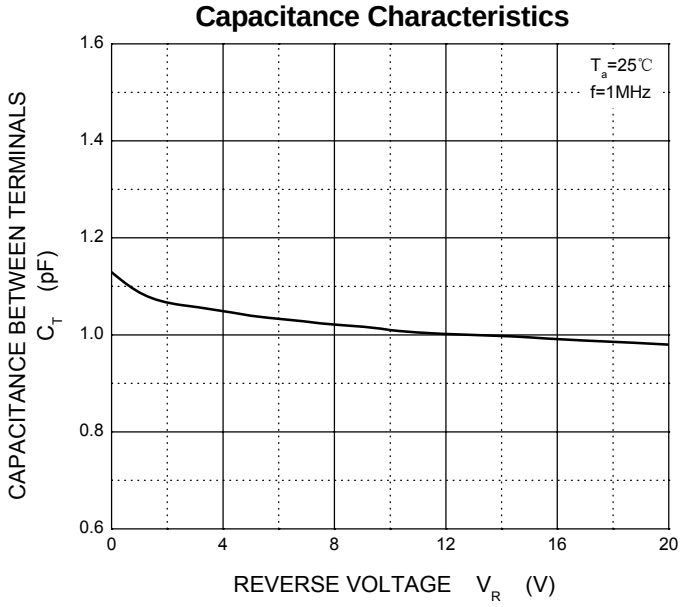


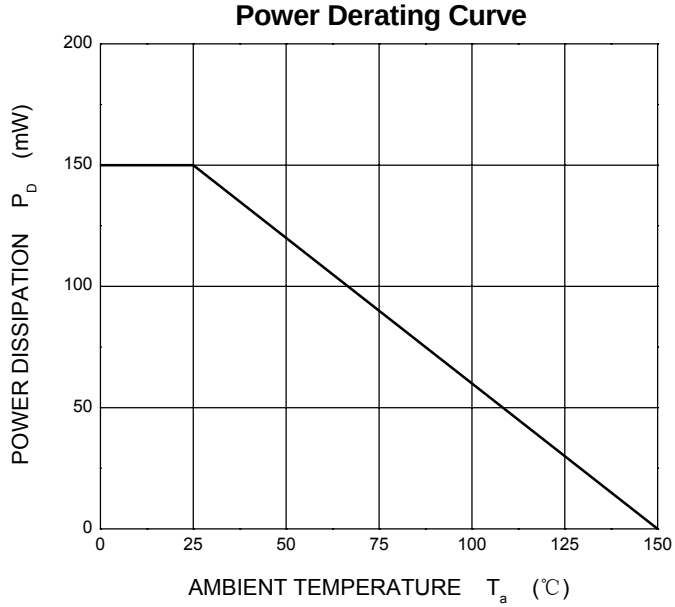

SOT-523 Package Outline Dimensions

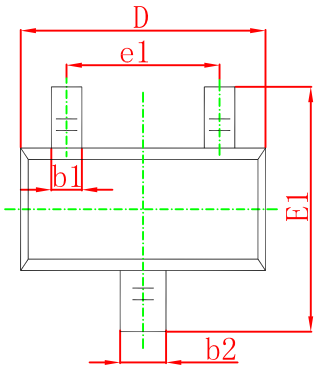


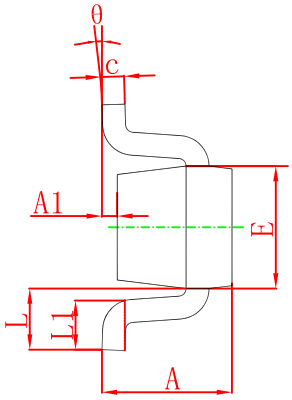



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout




Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h

SOT-523 Tape and Reel

SOT-523 Embossed Carrier Tape

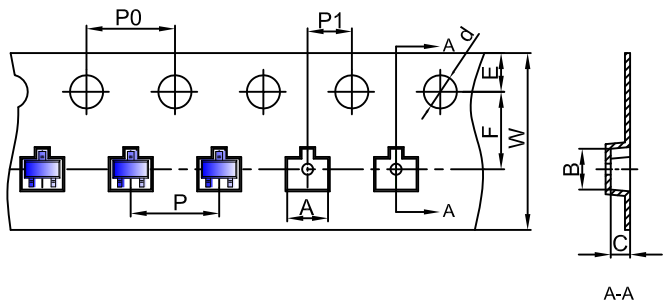


Packaging Description:


SOT-523 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-523	1.85	1.85	0.875	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-523 Tape Leader and Trailer

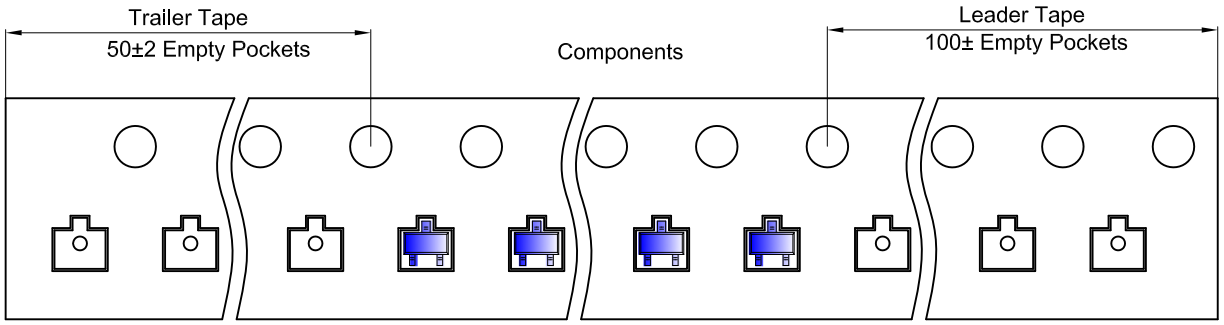

SOT-523 Reel

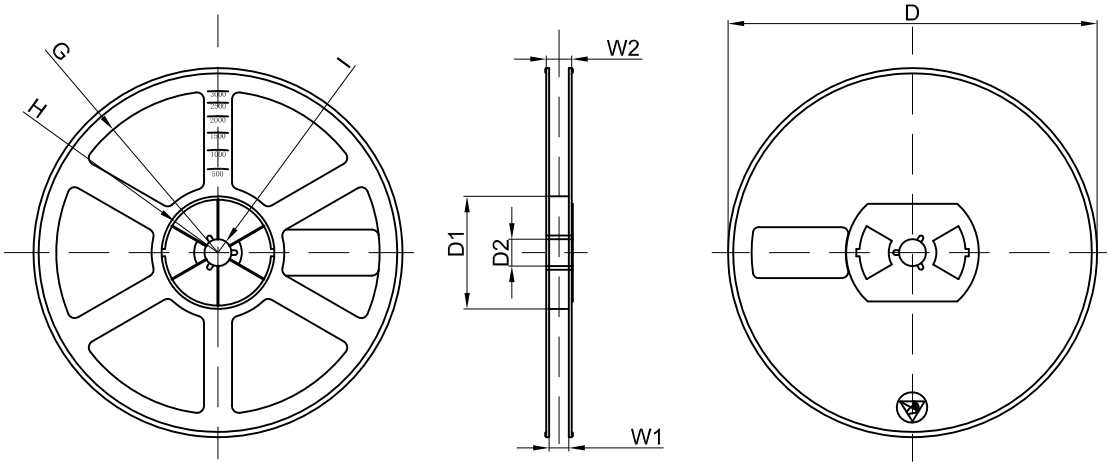

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	