SZCJ


Shenzhen Changji Semiconductor Co., LTD.

DO-27 Plastic-Encapsulate Diodes

SB320L THRU SB3100L Schottky Rectifier Diodes

Features

- $I_{F(AV)}$ 3A
- V_{RRM} 20V-100V
- Low power loss,high efficiency
- Polarity: Color band denotes cathode

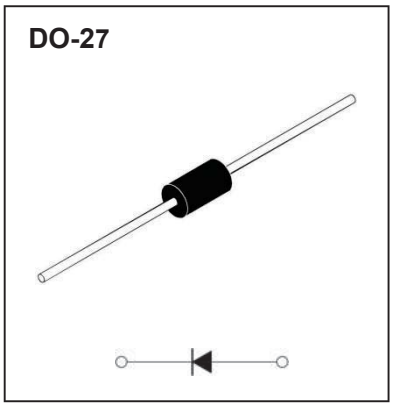

Applications

- Rectifier

Marking

- SB3XXL

  X：From 20 To 100

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	SB3						
				20L	30L	40L	50L	60L	80L	100L
Repetitive Peak Reverse Voltage	V_{RRM}	V		20	30	40	50	60	80	100
Maximum RMS Voltage	V_{RMS}	V		14	21	28	35	42	56	70
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load,TL(Fig.1)	3.0						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave , 1 cycle , Ta =25℃	80						
Junction Temperature	T_J	℃		-55~+125						-55 ~ +150
Storage Temperature	T_{STG}	℃		-55 ~ +150						

Electrical Characteristics (T=25℃ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		SB3					
					20L	30L	40L	50L	60L	80L	100L
Peak Forward Voltage	V_{FM}	V	I_{FM}=3.0A		0.45			0.5		0.70	
Peak Reverse Current	I_{RRM1}	mA	V_{RM}=V_{RRM}	Ta=25℃	0.5					0.2	
	I_{RRM2}			Ta=100℃	20.0					10.0	
Thermal Resistance(Typical)	$R_{\theta J-A}$	℃/W	Between junction and ambient		40						
	$R_{\theta J-L}$		Between junction and lead		20						

Notes:

1) Thermal resistance from junction to ambient at 0.375” (9.5mm) lead length,P.C.B.mounted

Typical Characteristics

FIG.1 FORWARD CURRENT DERATING CURVE

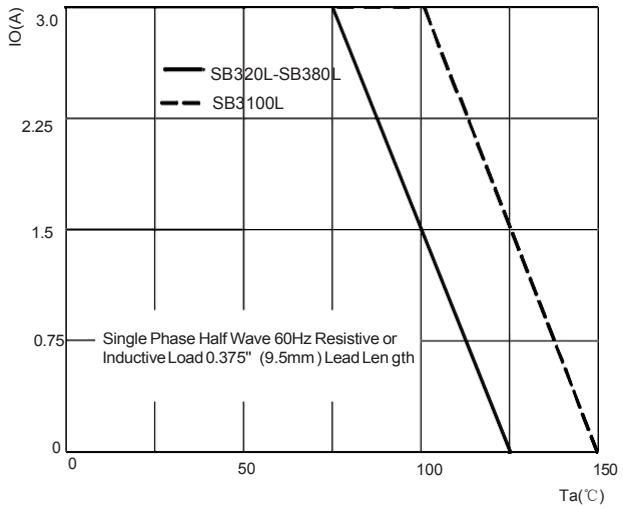


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

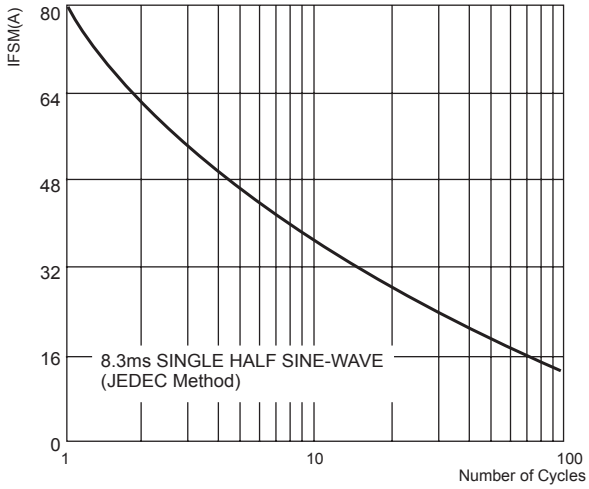


FIG.3: TYPICAL FORWARD CHARACTERISTICS



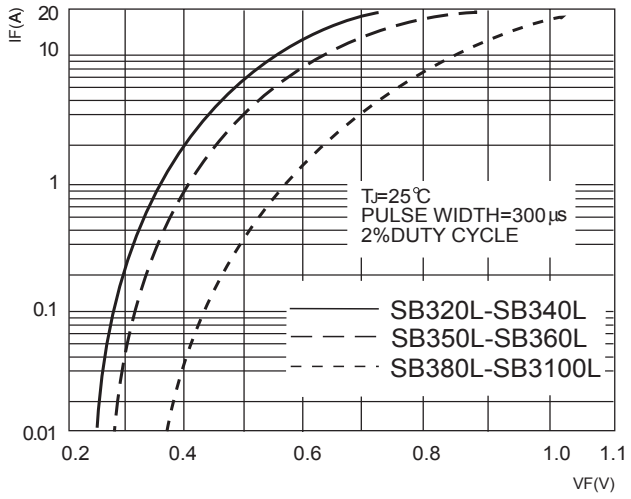


FIG.4: TYPICAL REVERSE CHARACTERISTICS

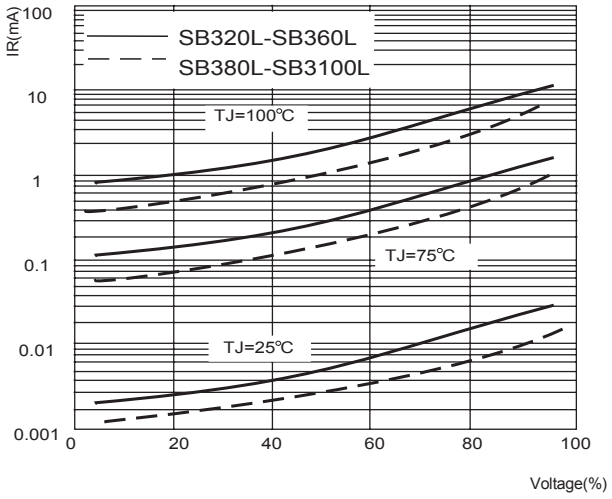

DO-27Package Outline Dimensions

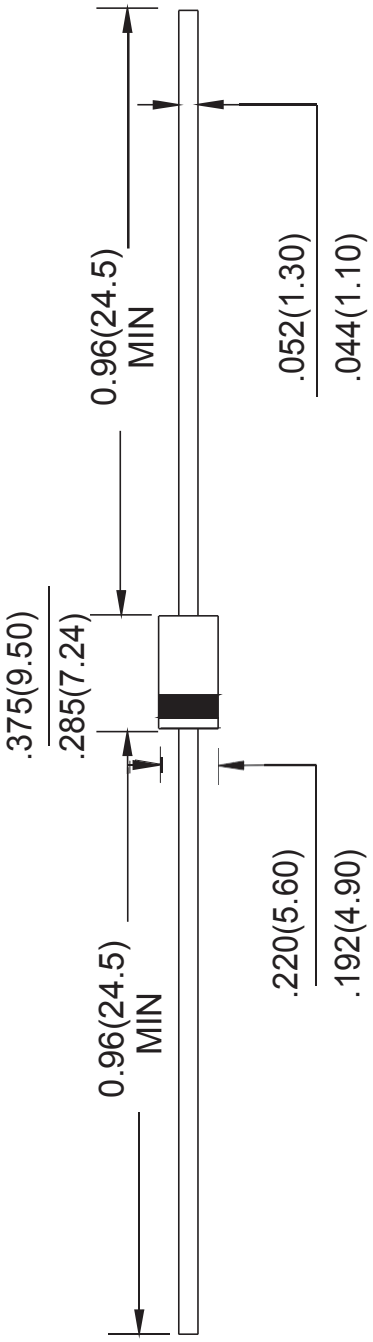

Unit: in inches (millimeters)


NOTICE

SZCJ reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein.SZCJ does not assume any liability arising out of the application or use of any product described herein.

Ammo Box Packaging Specifications For Axial Lead Rectifiers

Axial lead devices are packed in accordance with EIA standard RS-296-D and specifications given below

COMPONENT OUTLINE	COMPONENT PITCH A	INNER TAPE PITCH B	CUMULATIVE PITCH TOLERANCE
	±0.5mm(.020``)	+0.5mm(.020``)	
R-1	5.0mm	26.0mm	2.0mm/20pitch
R-1	5.0mm	52.4mm	2.0mm/10pitch
A-405	5.0mm	26.0mm	2.0mm/20pitch
A-405	5.0mm	52.4mm	2.0mm/10pitch
DO-34/DO-35	5.0mm	26.0mm	2.0mm/20pitch
DO-34/DO-35	5.0mm	52.4mm	2.0mm/10pitch
DO-41	5.0mm	26.0mm	2.0mm/20pitch
DO-41	5.0mm	52.4mm	2.0mm/10pitch
DO-15	5.0mm	52.4mm	2.0mm/10pitch
DO-27	10.0mm	52.4mm	2.0mm/10pitch
R-6	10.0mm	52.4mm	2.0mm/10pitch

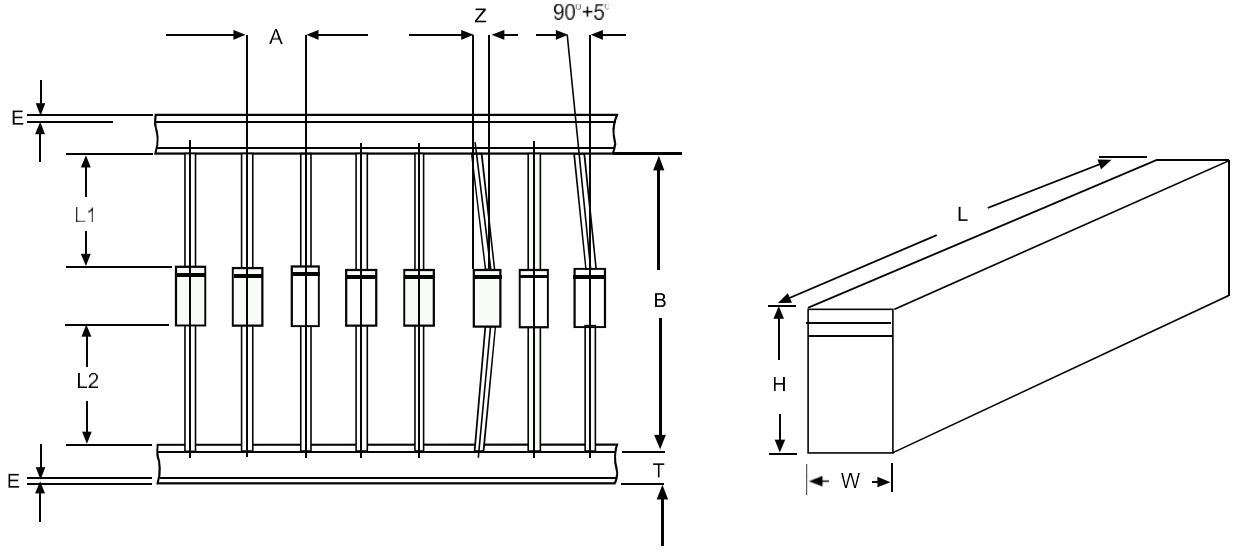

ITEM	SYMBOL	SPECIFICATIONS(mm)	SPECIFICATIONS(inch)
Component alignment	Z	1.2max	0.048max
Tape width	T	6.0±0.4	0.236±0.016
Exposed adhesive	E	0.8max	0.032max
Body eccentricity	IL1-L2I	1.0max	0.040max
Box length	L	255.0±5.0	10.04±0.197
Box width	W	78.0±5.0	3.07±0.197
Box height	H	150.0±5.0	5.91±0.197

NOTE:Each component lead shall be sandwiched between tapes for A minimum of 3.2mm(0.126``)