
SZCJ

Shenzhen Changji Semiconductor Co., LTD.

SOD-123 Plastic-Encapsulate Diodes




BAV19W~BAV21W SWITCHING DIODE

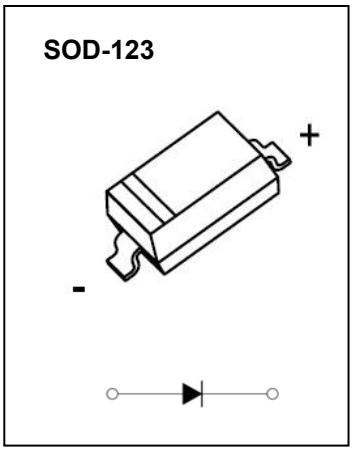

FEATURES

- Low Reverse Current
- Surface Mount Package Ideally Suited for Automatic Insertion
- Fast Switching Speed
- For General Purpose Switching Applications

MARKING:

BAV19W	BAV20W	BAV21W
A8	T2	T3
		

The marking bar indicates the cathode

Solid dot = Green molding compound device.

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)


Symbol	Parameter	Value			Unit
		BAV19W	BAV20W	BAV21W	
V_{RM}	Non-Repetitive Peak Reverse Voltage	120	200	250	V
V_{RRM}	Peak Repetitive Reverse Voltage	100	150	200	V
V_{RWM}	Working Peak Reverse Voltage				
$V_{R(RMS)}$	RMS Reverse Voltage	71	106	141	V
I_O	Average Rectified Output Current	200			mA
I_{FSM}	Non-repetitive Peak Forward Surge Current @ t=8.3ms	2.0			A
P_D	Power Dissipation	500			mW
$R_{\Theta JA}$	Thermal Resistance from Junction to Ambient	250			℃/W
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55~+150			℃

ELECTRICAL CHARACTERISTICS(T_a=25℃ unless otherwise specified)


Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reverse current	I_R	V_R=100V	BAV19W			0.1	uA
		V_R=150V	BAV20W			0.1	
		V_R=200V	BAV21W			0.1	
Forward voltage	V_F	I_F=100mA				1	V
		I_F=200mA				1.25	
Total capacitance	C_{tot}	V_R=0V,f=1MHz				5	pF
Reverse recovery time	t_{rr}	I_F= I_R =30mA, I_{rr}=0.1*I_R , R_L=100Ω				50	ns

BAV19W Typical Characteristics


Forward Characteristics

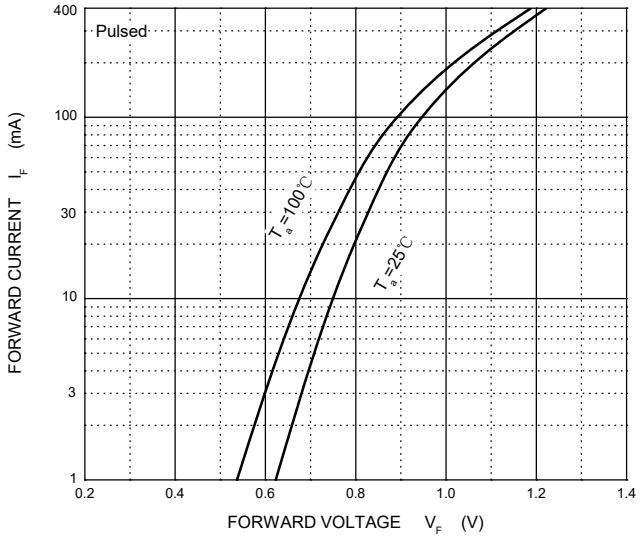


Reverse Characteristics

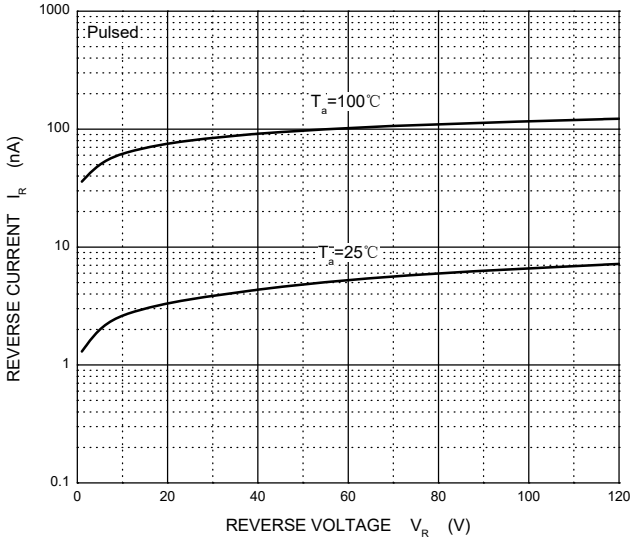


Capacitance Characteristics

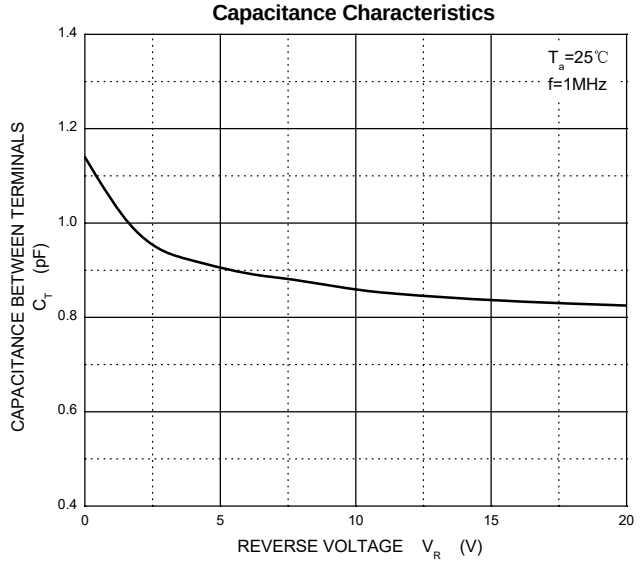



Power Derating Curve

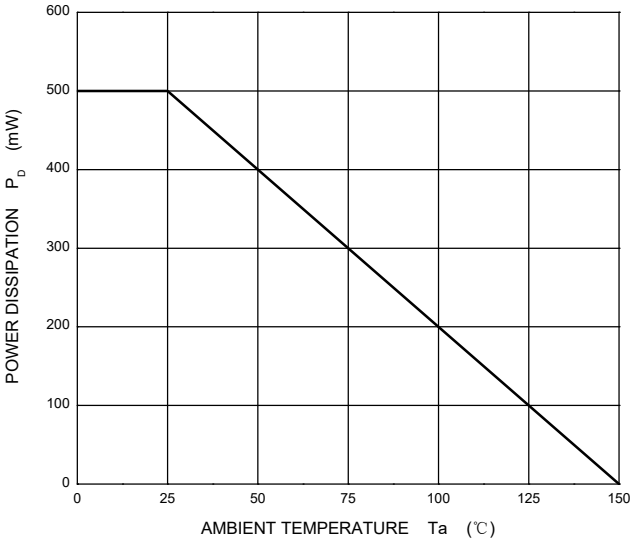

SOD-123 Package Outline Dimensions

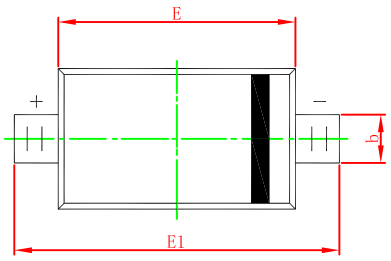




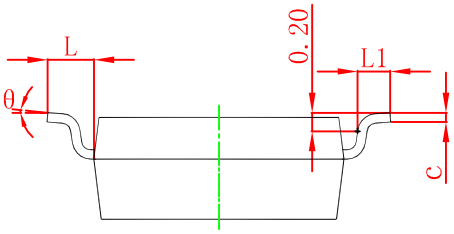

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	1.500	1.700	0.059	0.067
E	2.600	2.800	0.102	0.110
E1	3.550	3.850	0.140	0.152
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°

SOD-123 Suggested Pad Layout

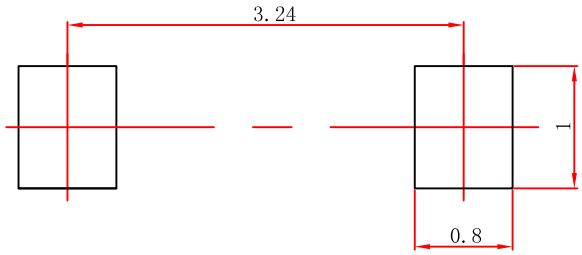


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h

SOD-123 Tape and Reel

SOD-123 Embossed Carrier Tape

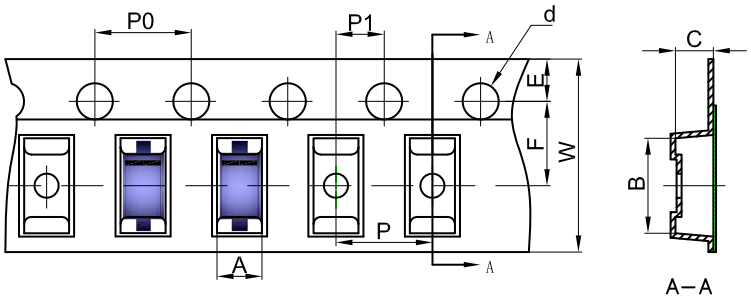


Packaging Description:


SOD-123 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOD-123	1.85	3.95	1.57	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

SOD-123 Tape Leader and Trailer

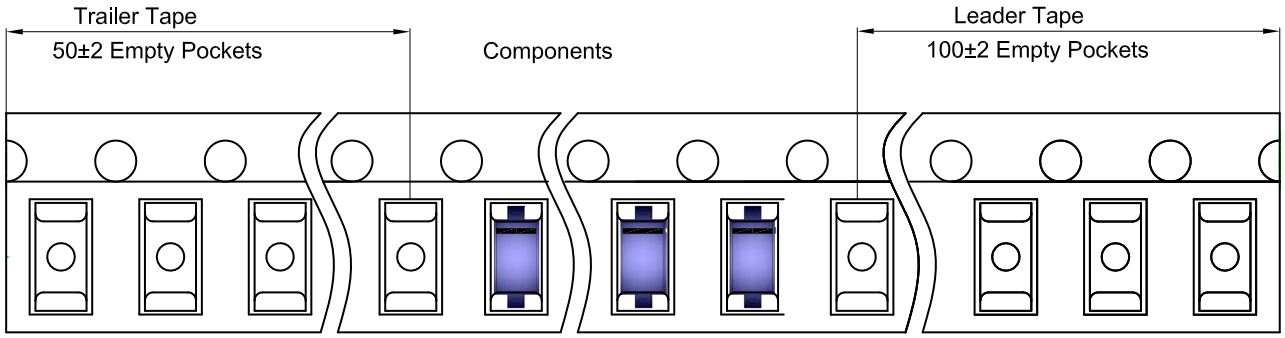

SOD-123 Reel

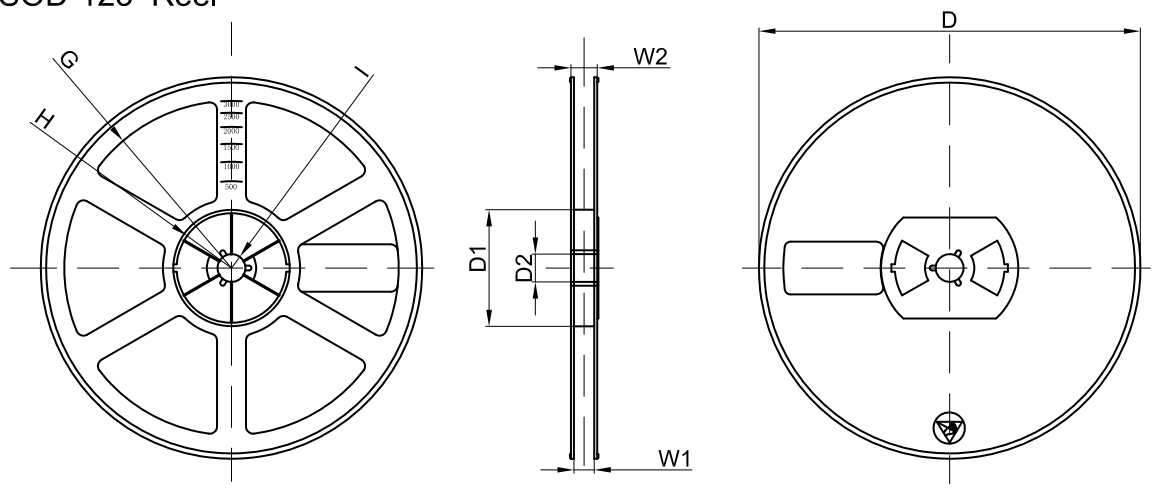

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	