SZCJ

Shenzhen Changji Semiconductor Co., LTD.

DFN1006-3L Plastic-Encapsulate MOSFETs


CJBA7002KL N-Channel MOSFET

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
60V	3.5Ω@10V	0.34A
	4.0Ω@4.5V	

DFN1006-3L



Bottom View



Top View
Internal Schematic


FEATURE

- High density cell design for Low $R_{DS(on)}$
- Voltage controlled small signal switch
- Rugged and reliable
- High saturation current capability
- ESD protected

APPLICATION


- Load Switch for Portable Devices
- DC/DC Converter

MARKING



Top View
KL=Device code
Solid dot = Pin 1 indicator

Equivalent Circuit



MOSFET MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current	I_D	0.34	A
Power Dissipation(note1)	P_D	275	mW
Thermal Resistance from Junction to Ambient(note1)	$R_{\theta JA}$	455	℃/W
Operation Junction and Storage Temperature Range	T_J,T_{STG}	-55~ +150	℃

MOSFET ELECTRICAL CHARACTERISTICS

MOSFET ELECTRICAL CHARACTERISTICS(T_a=25℃ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static Characteristics						
Drain-Source Breakdown Voltage	V_{DS}	V_{GS} = 0V, I_D =250μA	60			V
Gate Threshold Voltage*	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =1mA	1	1.6	2.5	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} =48V,V_{GS} = 0V			1	μA
Gate –Source leakage current	I_{GSS1}	V_{GS} =±20V, V_{DS} = 0V			±10	μA
	I_{GSS2}	V_{GS} =±10V, V_{DS} = 0V			±200	nA
	I_{GSS3}	V_{GS} =±5V, V_{DS} = 0V			±100	nA
Drain-Source On-Resistance*	$R_{DS(on)}$	V_{GS} =10V,I_D =340mA			3.5	Ω
		V_{GS} = 4.5V, I_D =200mA			4	Ω
Diode Forward Voltage	V_{SD}	V_{GS}=0V, I_S=240mA			1.5	V
Recovered charge	Q_r	V_{GS}=0V,I_S=240mA,V_R=25V, dI_S/dt=-100A/μS		30		nC
Dynamic Characteristics**						
Input Capacitance	C_{iss}	V_{DS} =10V,V_{GS} =0V,f =1MHz			40	pF
Output Capacitance	C_{oss}				30	pF
Reverse Transfer Capacitance	C_{rss}				10	pF
Switching Characteristics**						
Turn-On Delay Time	$t_{d(on)}$	V_{GS}=10V,V_{DD}=50V,R_G=50Ω, R_{GS}=50Ω, R_L=250Ω			10	ns
Turn-Off Delay Time	$t_{d(off)}$				15	ns
Reverse recovery Time	t_{rr}	V_{GS}=0V,I_S=300mA,V_R=25V, dI_S/dt=-100A/μS		30		ns
GATE-SOURCE ZENER DIODE						
Gate-Source Breakdown Voltage	BV_{GSO}	I_{gs}=±1mA (Open Drain)	±21.5		±30	V

Notes :


*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%.

**These parameters have no way to verify.


1.Surface mounted on FR4 board using 1 square inch pad size, 1oz copper.

Typical Characteristics


Output Characteristics

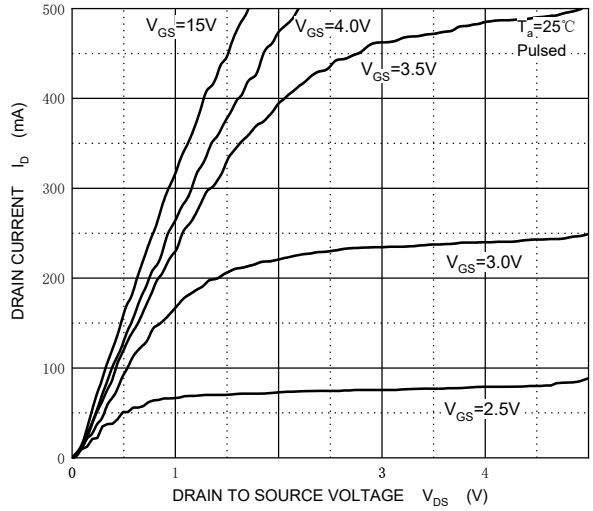


Transfer Characteristics

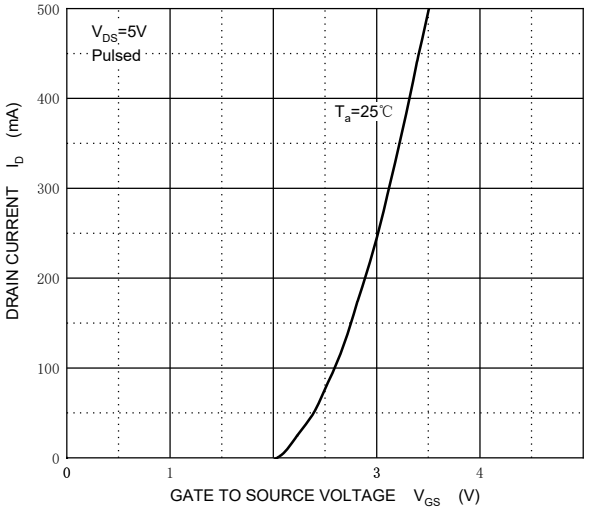


$R_{DS(ON)}$ —— I_D

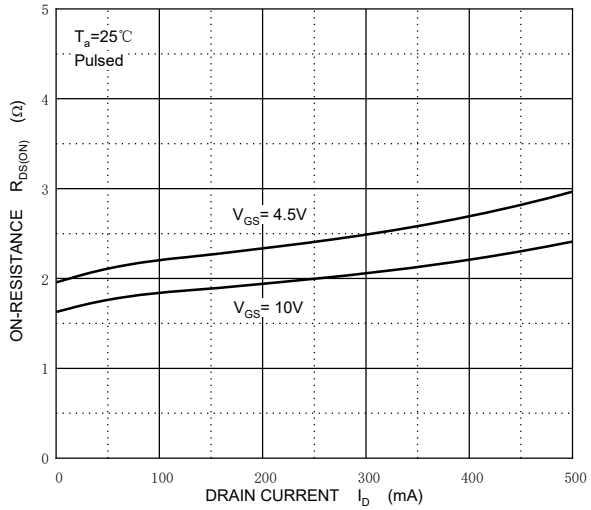


$R_{DS(ON)}$—— V_{GS}

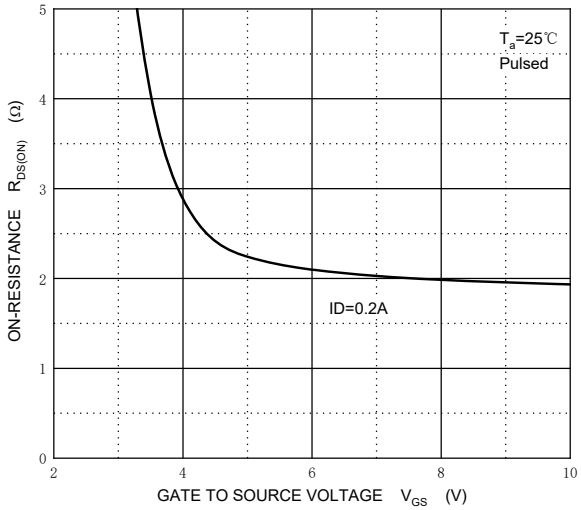


I_S —— V_{SD}

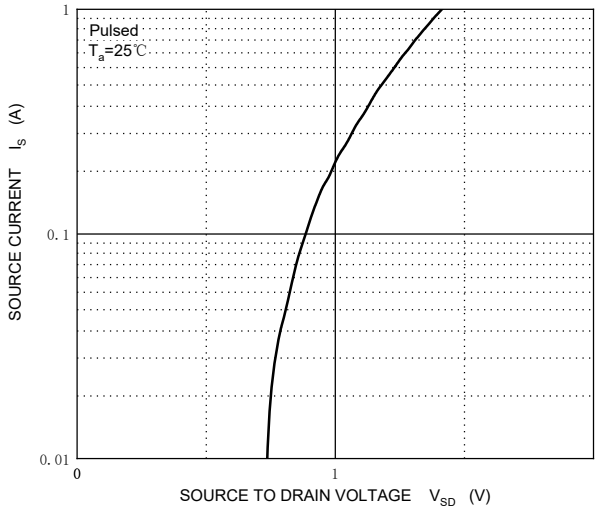


Threshold Voltage

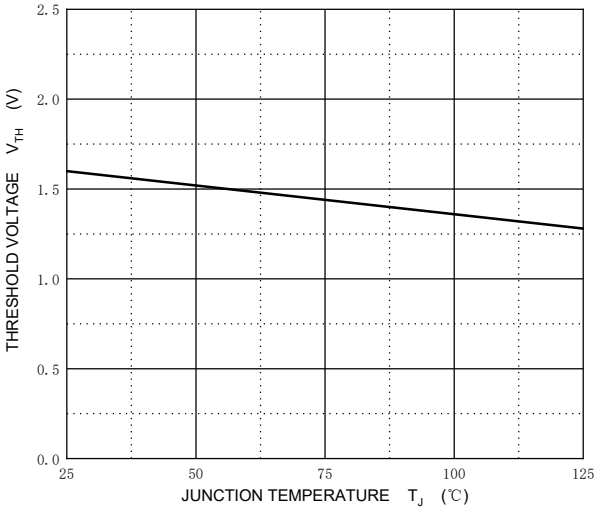


DFN1006-3L Package Outline Dimensions

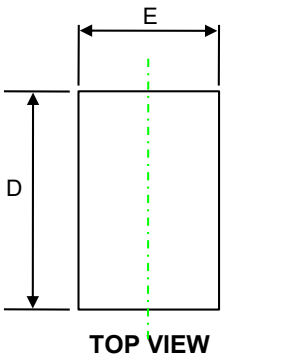

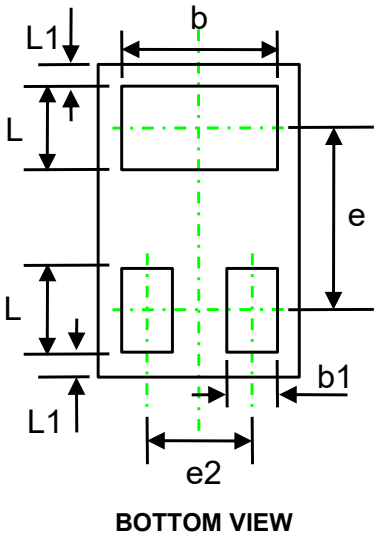

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.400	0.550	0.016	0.022
A1	0.000	0.050	0.000	0.002
D	0.950	1.050	0.037	0.041
E	0.550	0.650	0.022	0.026
b	0.450	0.550	0.018	0.022
e	0.650 REF.		0.026 REF.	
e2	0.350 REF.		0.014 REF.	
L1	0.050 REF.		0.002 REF.	
L	0.200	0.300	0.008	0.012
b1	0.100	0.200	0.004	0.008

DFN1006-3L Suggested Pad Layout

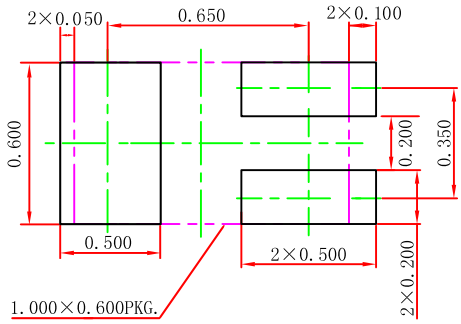


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.050mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h


DFN1006-3L Tape and Reel

DFN1006-3L Embossed Carrier Tape

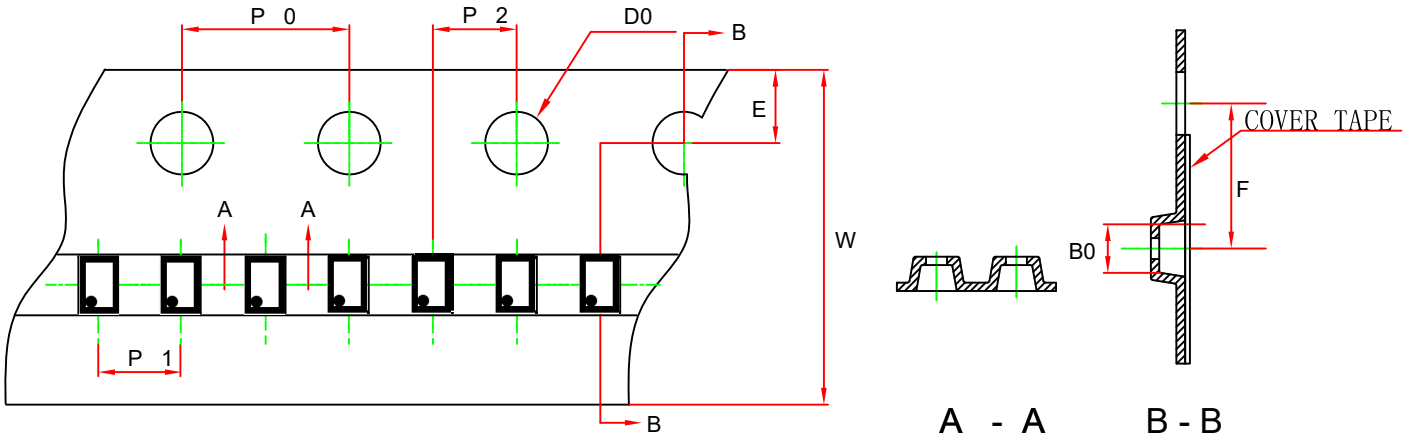


Dimensions In Millimeters (mm)								
Pkg type	B0	P0	P1	P2	E	F	W	D0
DFN1006-3L	1.11	4.00	2.00	2.00	1.75	3.50	8.00	1.55
Tolerance	+/-0.06	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.3	+/-0.1

DFN1006-3L Tape Leader and Trailer

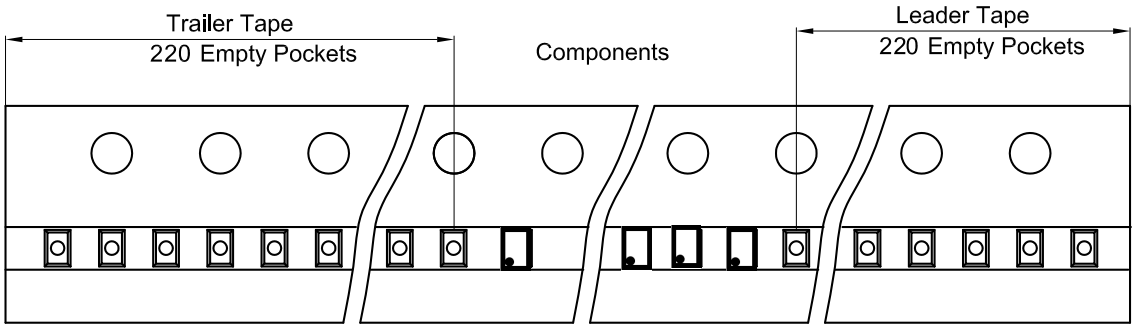

DFN1006-3L Reel

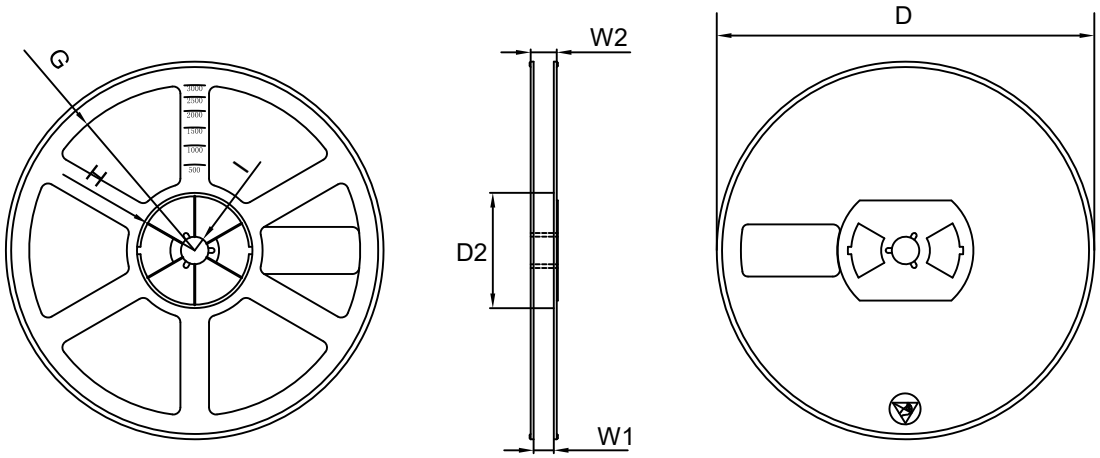

Symbol	Dimensions In Millimeters (mm)						
	D	D2	G	H	I	W1	W2
7" Dia	Φ178.00	54.50	R78.00	R25.6	R6.5	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-2	+/-1.5

REEL	Reel Size	Box	Box size(mm)	Carton	Carton Size(mm)
10000 pcs	7 inch	150000 pcs	220×220×210	600000 pcs	450×450×240