
SZCJ

Shenzhen Changji Semiconductor Co., LTD.

TO-252-2L Plastic-Encapsulate Voltage Regulators

CJ7912 Three-terminal negative voltage regulator

TO-252-2L



FEATURES

- Maximum output current
  I_{OM}: 1.5 A
- Output voltage
  V_O:- 12V
- Continuous total dissipation
  P_D: 1.25 W (T_a= 25 ℃)

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	-30	V
Thermal Resistance from Junction to Air	$R_{\theta JA}$	100	℃/W
Operating Junction Temperature Range	T_{OPR}	-40~+125	℃
Storage Temperature Range	T_{STG}	-65~+150	℃

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JINCTION TEMPERATURE (Vi=-19V,Io=500mA, C_i=2.2μF,Co=1μF, unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	Vo	T_J=25℃	-11.64	-12	-12.36	V
		-14.5V≤V_i≤-27V, Io=5mA-1A	-11.4	-12	-12.6	V
Load Regulation	ΔVo	Io=5mA-1.5A ,T_J=25℃		15	200	mV
		Io=250mA-750mA ,T_J=25℃		5	75	mV
Line Regulation	ΔVo	-14.5V≤V_i≤-30V ,T_J=25℃		5	80	mV
		-16V≤V_i≤-22V ,T_J=25℃		3	30	mV
Quiescent Current	Iq	T_J=25℃		2	3	mA
Quiescent Current Change	ΔIq	-14.5V≤V_i≤-30V			0.5	mA
	ΔIq	5mA≤I_O≤1A			0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz ,T_J=25℃		300		μV/Vo
Output Voltage Drift	△Vo/△$_T$	I_O=5mA		-0.8		mV/℃
Ripple Rejection	RR	-15V≤V_i≤-25V,f=120Hz	54	60		dB
Dropout Voltage	Vd	Io=1A ,T_J=25℃		1.1		V
Peak Current	Ipk	T_J=25℃		2.1		A

* Pulse test.

TYPICAL APPLICATION

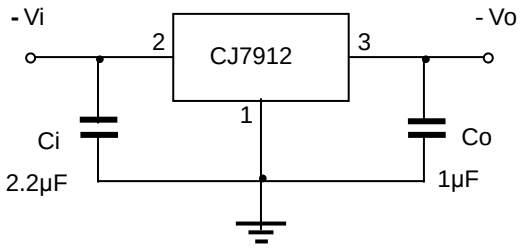


TO-252-2L Package Outline Dimensions

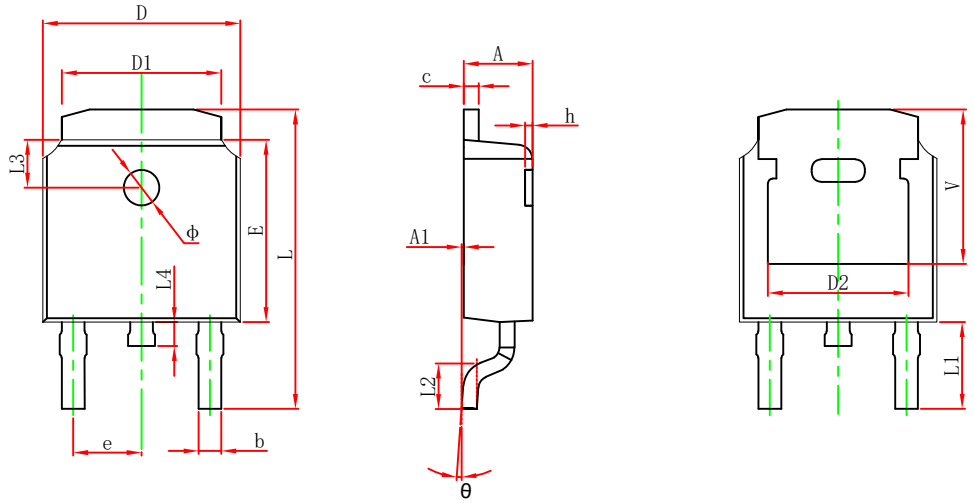

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	


TO-252-2L Suggested Pad Layout

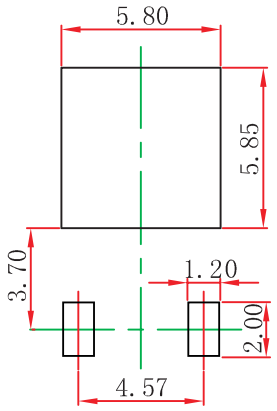

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

TO-252-2L Tape and Reel

TO-252 Embossed Carrier Tape

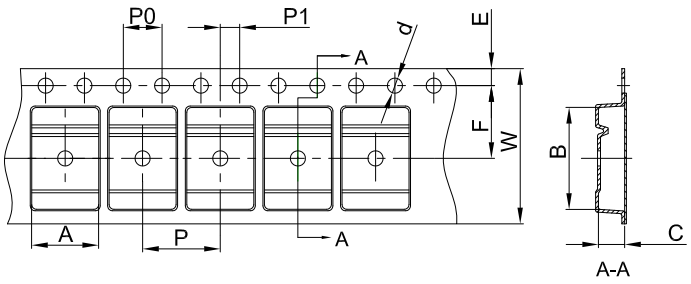


Packaging Description:


TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 25,00 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252 Tape Leader and Trailer

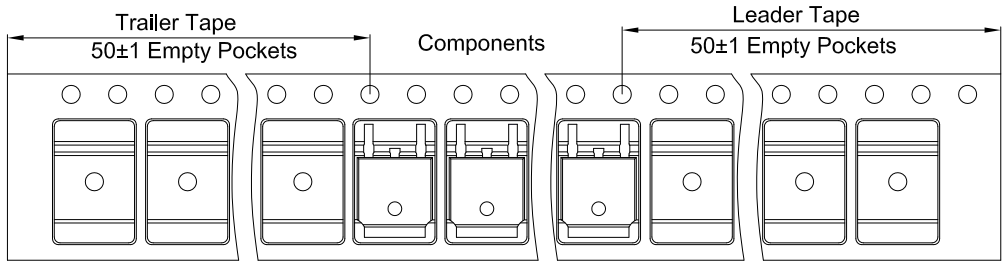

TO-252 Reel

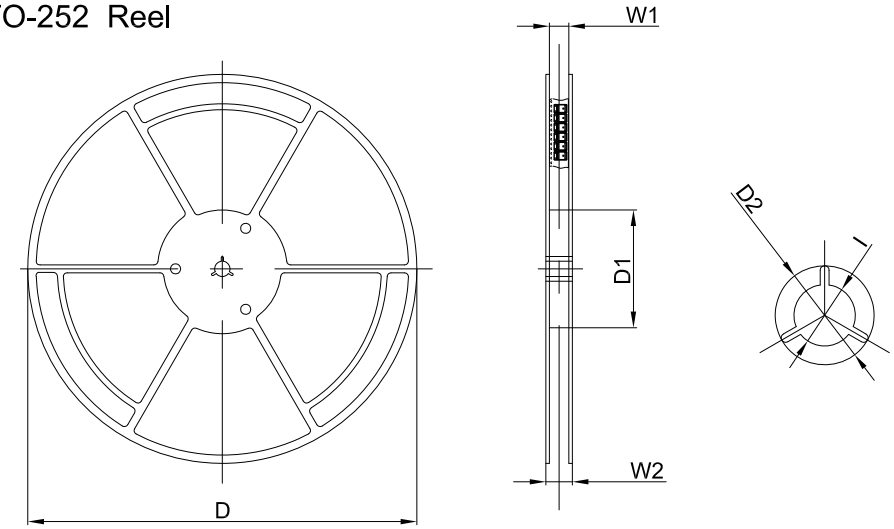


Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13"Dia	330.00	100.00	Ø21.00	16.40	21.00	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13inch	2,500 pcs	340×336×29	25,000 pcs	353×346×365	

szcjsemi.com

TO-252-2L Tape and Reel

TO-252-2L Embossed Carrier Tabe

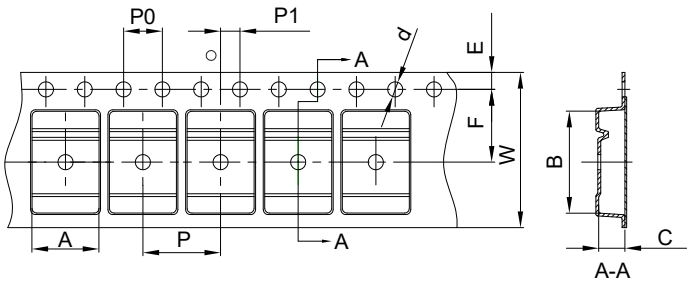


Packaging Description:


TO-252-2L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Hear Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2500 units per 13″ or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Φ1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252-2L Tape Leader and Trailer

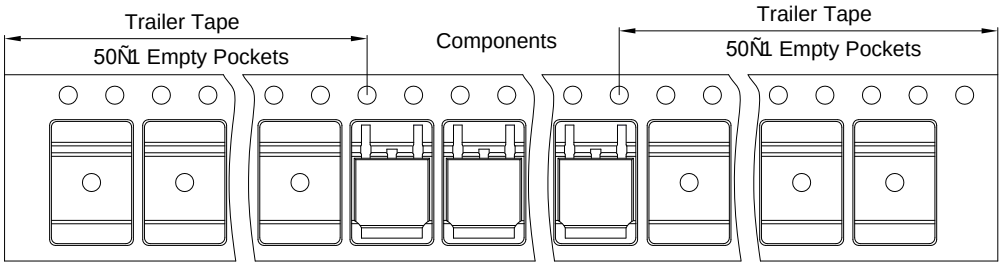

TO-252-2L Reel

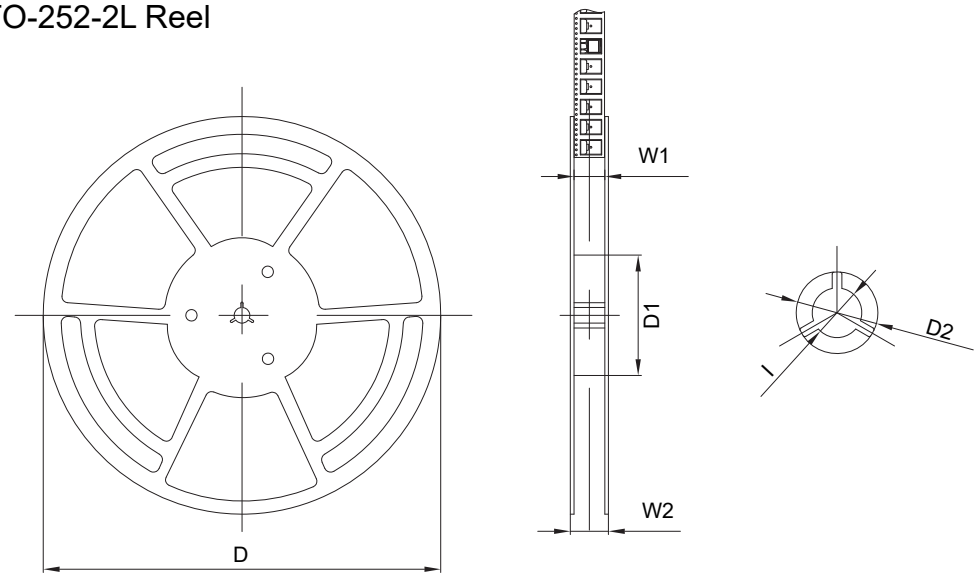

Dimensions are in millimeter						
Reel	D	D1	D2	W1	W2	I
13" Dia	330.00	100.00	Φ21.00	16.40	21.40	Φ13.00

Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
2500 pcs	13 inch	5000 pcs	360×360×65	25000 pcs	378×358×382

szcsemi.com