
JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.

TO-126A Plastic-Encapsulate Transistors


2SC2314 TRANSISTOR (NPN)

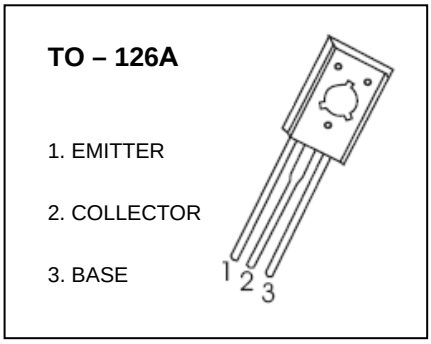

FEATURES


- Transceiver Driver Applications

MARKING



C2314=Device code
Solid dot = Green molding compound device, if none, the normal device
XX=Code

Equivalent Circuit



ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
2SC2314	TO-126A	Bulk	200pcs/Bag
2SC2314-TU	TO-126A	Tube	60pcs/Tube

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	45	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	1	A
P_C	Collector Power Dissipation	0.75	W
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	167	℃/W
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	℃

ELECTRICAL CHARACTERISTICS


T_a=25℃ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C=10μA,I_E=0	75			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	I_C=1mA,I_B=0	45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=10μA,I_C=0	5			V
Collector cut-off current	I_{CBO}	V_{CB}=40V,I_E=0			1	μA
Emitter cut-off current	I_{EBO}	V_{EB}=4V,I_C=0			1	μA
DC current gain	h_{FE}	V_{CE}=5V, I_C=500mA	60		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	I_C=500mA,I_B=50mA			0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	I_C=500mA,I_B=50mA			1.2	V
Collector output capacitance	C_{ob}	V_{CB}=10V,I_E=0, f=1MHz			25	pF
Transition frequency	f_T	V_{CE}=10V,I_C=50mA	180			MHz

CLASSIFICATION OF h_{FE}

RANK	D	E	F
RANGE	60-120	100-200	160-320

TO-126A Package Outline Dimensions

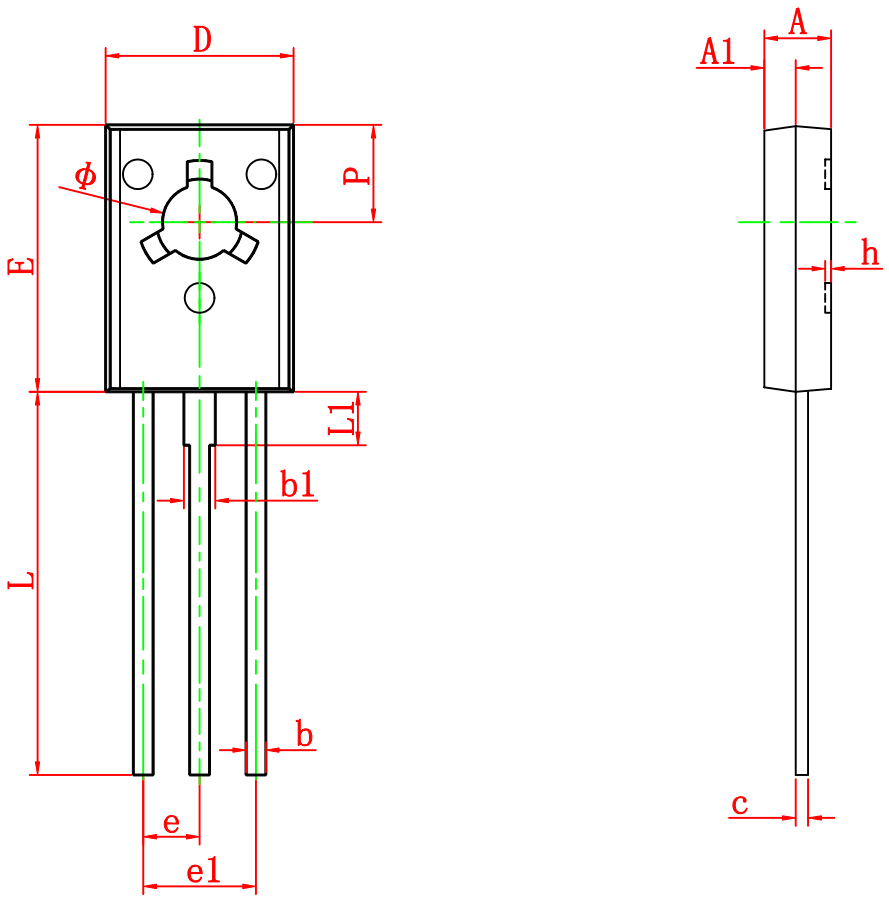

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.500	2.900	0.098	0.114
A1	1.100	1.500	0.043	0.059
b	0.660	0.860	0.026	0.034
b1	1.170	1.370	0.046	0.054
c	0.300	0.600	0.012	0.024
D	7.400	7.800	0.291	0.307
E	10.600	11.000	0.417	0.433
e	2.290 TYP		0.090 TYP	
e1	4.480	4.680	0.176	0.184
h	0.000	0.300	0.000	0.012
L	15.300	15.700	0.602	0.618
L1	2.100	2.300	0.083	0.091
P	3.900	4.100	0.154	0.161
Φ	3.000	3.200	0.118	0.126