
SZCJ

Shenzhen Changji Semiconductor Co., LTD.

DFN1610-2L-A Plastic-Encapsulate Diodes

ESDUNK4V8C1U Uni-direction Transient Voltage Suppressor

DFN1610-2L-A





DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, high level of ESD protection makes them a flexible solution for applications such as Digital cameras,cellular phones.

It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.


FEATURES

- Uni-directional ESD protection of one line
- Reverse stand−off voltage: 4.85V
- Low reverse clamping voltage
- Low leakage current
- Excellent package:1.60mm×1.00mm×0.50mm
- Peak pulse power: 1800 W (IEC61000-4-5 8/20μs)
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection
- Surge protection according to IEC61000-4-5 8/20μs waveform: I_{PPM} 180A

APPLICATIONS

- Computers and peripherals
- Power lines
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Tablets
- Other electronics equipments communi-cation systems

MARKING



Front side

04C = Device code

The marking bar indicates the cathode

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter		Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	Air Model	V_{ESD}(1)	±30	kV
	Contact Model		±30	
JESD22-A114-B ESD Voltage	Per Human Body Model		±16	
ESD Voltage	Machine Model		±0.4	
Peak Pulse Power		P_{PP}(2)	1800	W
Peak Pulse Current		I_{PP}(2)	180	A
Lead Solder Temperature − Maximum (10 Second Duration)		T_L	260	℃
Operation Junction and Storage Temperature Range		T_J,T_{stg}	-55 ~ +150	℃

(1).Device stressed with ten non-repetitive ESD pulses.

(2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.


ESD standards compliance

IEC61000-4-2 Standard


Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0～249
1A 1B 1C	250～499 500～999 1000～1999
2	2000～3999
3A 3B	4000～7999 8000～15999

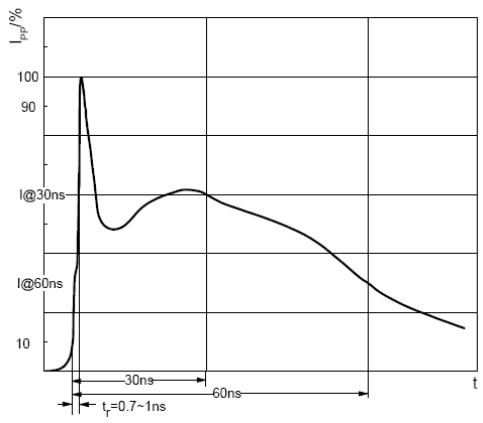


ESD pulse waveform according to IEC61000-4-2

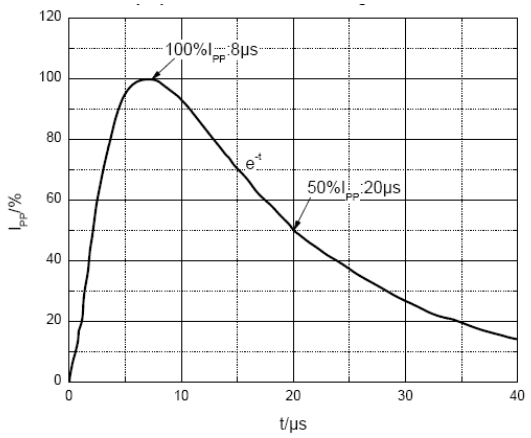

8/20μs pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage
V_F	Forward Voltage@ I_F
I_F	Forward Current

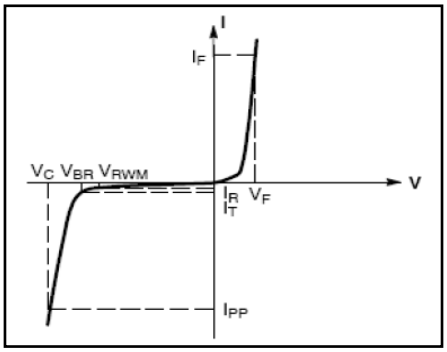

V-I characteristics for a uni-directional TVS

ELECTRICAL CHARACTERISTICS(T_a=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	V_{RWM} (1)				4.85	V
Reverse leakage current	I_R	V_{RWM}=4.85V			1	μA
Breakdown voltage	$V_{(BR)}$	I_T=1mA	4.9			V
Forward voltage	V_F	I_F=10mA			1.2	V
Clamping voltage	V_C	I_{PP}=10A		6	7.5	V
		I_{PP}=180A		8.5	10.5	V
TLP clamping voltage	V_C	I_{TLP} =8A, Pulse Width=100ns		6.9		V
		I_{TLP} =16A, Pulse Width=100ns		7.0		V
Dynamic resistance	R_{DYN} (3)	Pulse Width=100ns		0.014		Ω
Junction capacitance	C_J	V_R=0V,f=1MHz		560	700	pF


(1).Other voltages available upon request.

(2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.


(3).R_{DYN} is calculated from 8A to 16A.

TYPICAL CHARACTERISTICS


Forward Characteristics

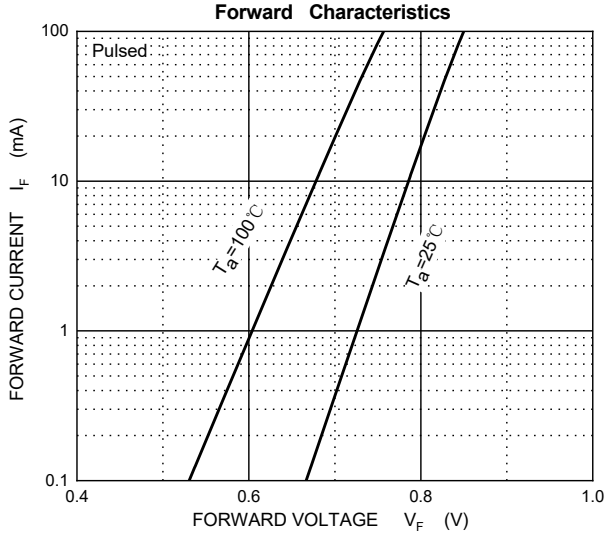


Reverse Characteristics

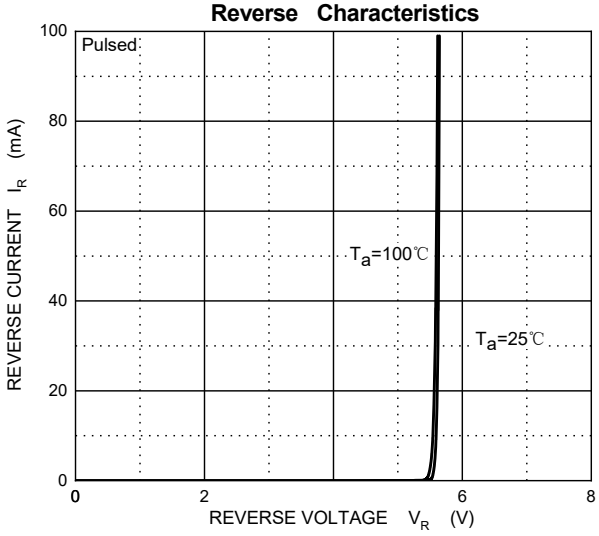


Power Derating Curve

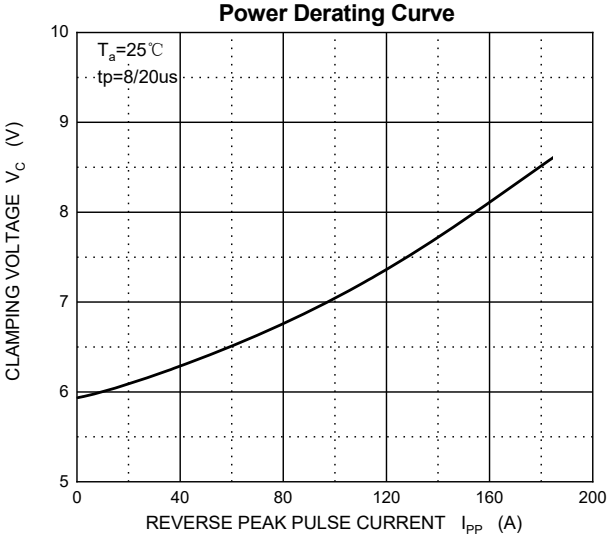

Capacitance Characteristics

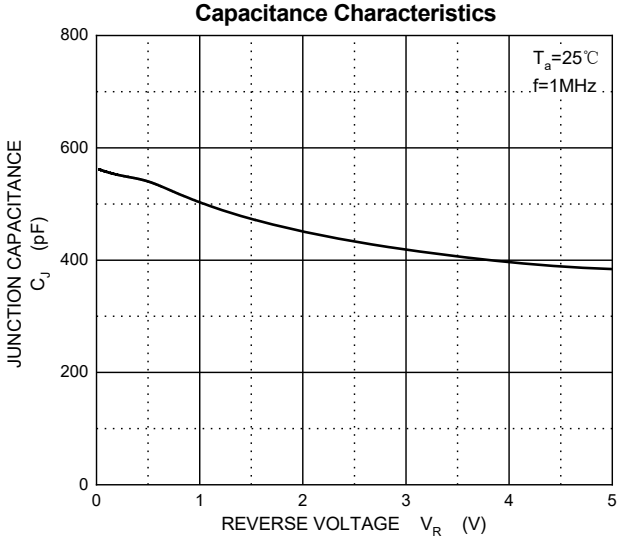


Transmission Line Pulsing (TLP) Measurement

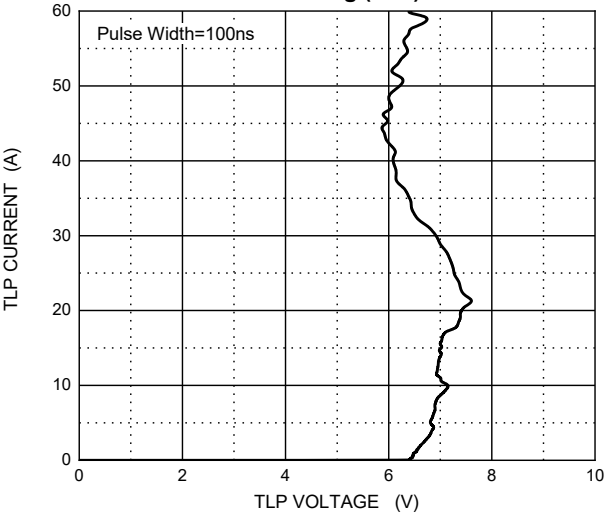


PACKAGE OUTLINE AND PAD LAYOUT INFORMATION

DFN1610-2L-A Package Outline Drawing

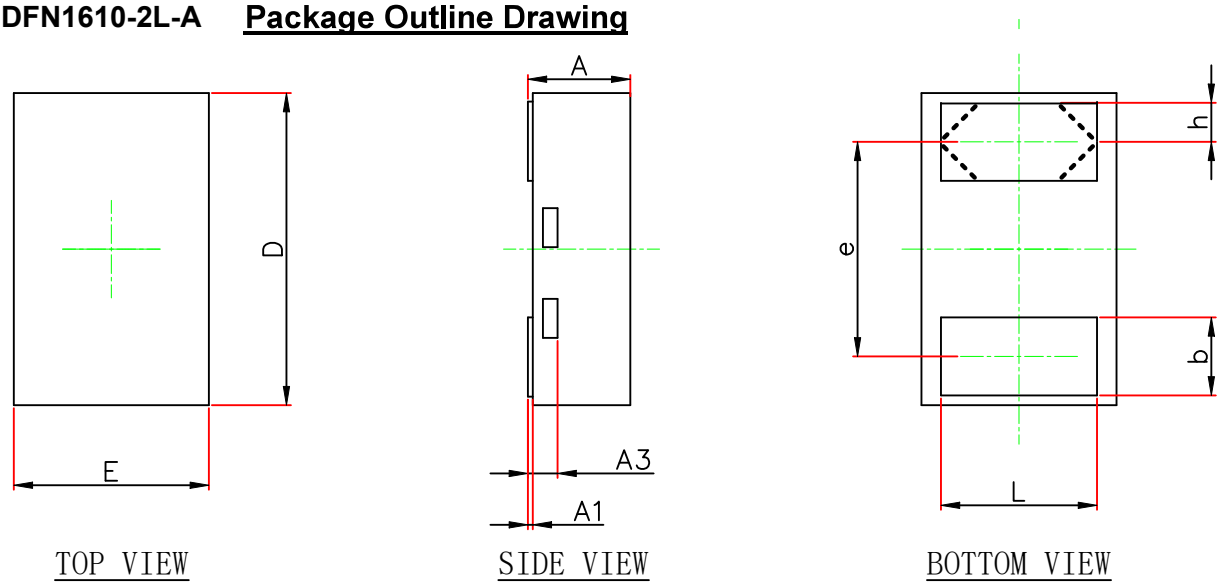

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.450	0.600	0.018	0.024
A1	0.000	0.050	0.000	0.002
A3	0.100	0.200	0.004	0.008
D	1.550	1.650	0.061	0.065
E	0.950	1.050	0.037	0.041
b	0.350	0.450	0.014	0.018
e	1.100TYP.		0.043TYP.	
L	0.750	0.950	0.030	0.037
h	0.150	0.250	0.006	0.010

Suggested Land Pattern

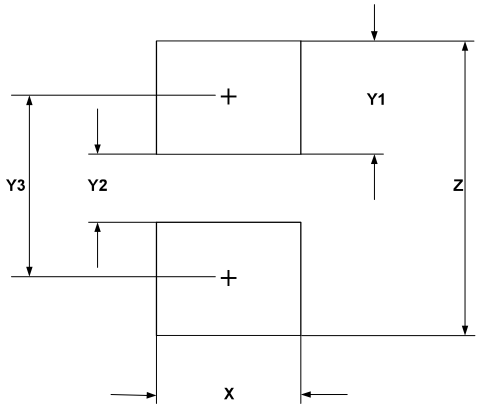


SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	1.00	0.040
Y1	0.62	0.025
Y2	0.60	0.024
Y3	1.22	0.049
Z	1.85	0.074

NOTICE

SZCJ reserve the right to make modifications,enhan ts,improvements,corrections or other c s without turther notice to any product herein. SZCJ oes not assume any liability arising out of the application or use of any product described .

TAPE AND REEL INFORMATION

DFN1610-2L-A Embossed Carrier Tape

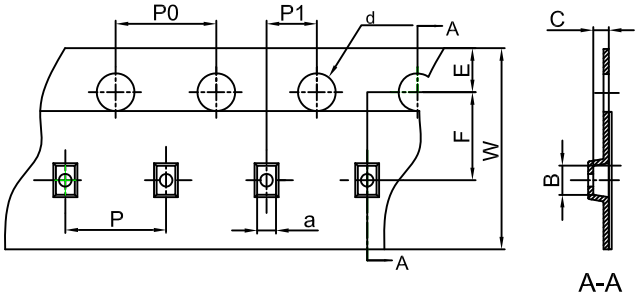


Packaging Description:


DFN1610-2L-A parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
DFN1610-2L	1.20	1.80	0.70	Ø1.50	1.75	3.50	4.00	2.00	2.00	8.00

DFN1610-2L-A Tape Leader and Trailer

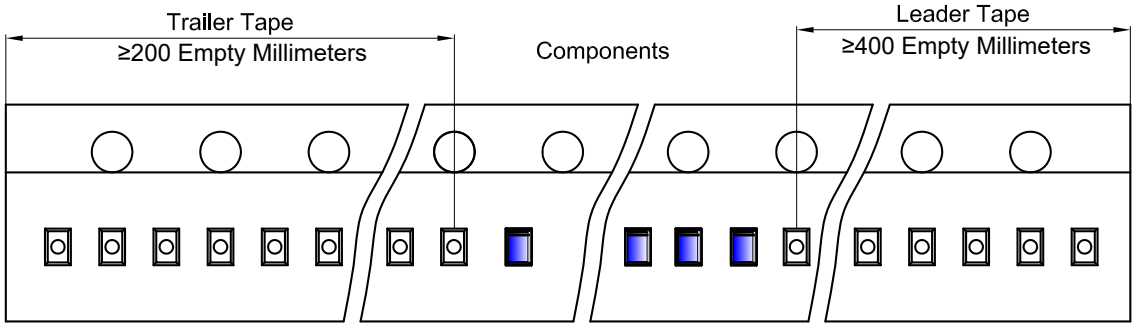

DFN1610-2L-A Reel

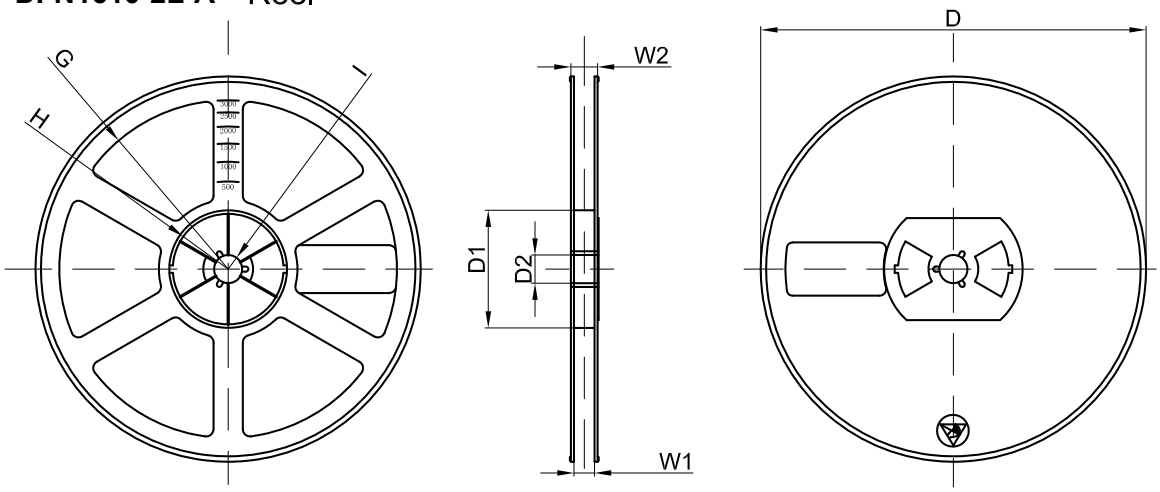

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
5,000 pcs	7 inch	75,000 pcs	210×208×205	300,000 pcs	440×440×230	