
1A LOW DROPOUT LINEAR REGULATOR

CJU1117B-XXX

TO-252-2L



1. GND/ADJ
2. OUTPUT
3. IN

FEATURES

- Low Dropout Voltage: 1.3V at 1A Output Current
- Trimmed Current Limit
- On-Chip Thermal Shutdown
- Three-Terminal Adjustable or Fixed 1.8V, 2.5V, 3.3V, 5V
- Operation Junction Temperature: -40 ℃ to 125℃

GENERAL DESCRIPTION

The CJU1117B-XXX is a series of low dropout three-terminal regulators with a dropout of 1.3V at 1A output current.

The CJU1117B-XXX series provides current limiting and thermal shutdown. Its circuit includes a trimmed bandage. reference to assure output voltage accuracy to be within 1.5%. Current limit is trimmed to ensure specified. output current and controlled short-circuit current. On-chip thermal shutdown provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

The CJU1117B-XXX has an adjustable version, that can provide the output voltage from 1.25V to 12V with only 2 external resistors.

APPLICATIONS

- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD-Video Player
- NIC/Switch
- Telecom Modem
- ADSL Modem
- Printer and other peripheral Equipment

MAXIMUM RATINGS

ORDERING INFORMATION

Package	Operating Junction Temperature Range	Part NO.
TO-252-2L	-40 to 125℃	CJU1117B-ADJ
		CJU1117B-1.8
		CJU1117B-2.5
		CJU1117B-3.3
		CJU1117B-5.0

ABOSLUTE MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	20	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	80	℃/W
Operating Ambient Temperature	T_A	-40~+85	℃
Operating Junction Temperature	T_j	-40~+125	℃
Storage Temperature	T_{stg}	-40~+150	℃
Lead Temperature (Soldering, 10sec.)	T_L	260℃,10s	

Note: Stresses greater than those listed under ”Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value	Unit
Input Voltage	V_i	15	V
Operating Junction Temperature	T_j	-40~+125	℃

ESD RATINGS

Parameter	Symbol	Value	Unit
Electrostatic discharge	$V_{ESD-HBM}$	2000	V
	V_{ESD-MM}	400	

Note: ESD testing is conducted in accordance with the relevant specifications formulated by the Joint Electronic Equipment Engineering Commission (JEDEC). The human body mode (HBM) electrostatic discharge test is based on the JESD22-114D test standard, using a 100pF capacitor and discharging to each pin of the device through a resistance of 1.5kΩ. The electrostatic discharge test in mechanical mode (MM) is based on the JESD22-115-A test standard and uses a 200pF capacitor to discharge directly to each pin of the device.


ELECTRICAL CHARACTERISTICS

V_{IN}≤10V, T_J=25℃ unless otherwise specified.


Parameter	Symbol	Part No.	Test Conditions	Min	Typ	Max	Unit
Reference Voltage	V_{IROC}	**CJU1117B-ADJ**	I_{OUT}=10mA, V_{IN} =3.23V	1.231	1.250	1.269	V
			10mA≤I_{OUT}≤1A, 2.75V≤V_{IN} -V_{OUT} ≤13.25V	1.225	1.250	1.275	
Output Voltage	V_O	**CJU1117B-1.8**	I_{OUT}=10mA, V_{IN}=3.8V	1.773	1.8	1.827	V
			10mA≤I_{OUT}≤1A, 3.3V≤V_{IN} ≤12V	1.764	1.8	1.836	
		CJU1117B-2.5	I_{OUT}=10mA, V_{IN}=4.5V	2.463	2.5	2.538	V
			10mA≤I_{OUT}≤1A, 4V≤V_{IN} ≤12V	2.450	2.5	2.550	
		CJU1117B-3.3	I_{OUT}=10mA, V_{IN}=5.3V	3.251	3.3	3.350	V
			10mA≤I_{OUT}≤1A, 4.8V≤V_{IN} ≤12V	3.234	3.3	3.366	
		CJU1117B-5.0	I_{OUT}=10mA, V_{IN}=7.0V	4.925	5.0	5.075	V
			10mA≤I_{OUT}≤1A, 6.5V≤V_{IN} ≤12V	4.9	5.0	5.1	
Line Regulation	LNR	**CJU1117B-ADJ**	I_{OUT}=10mA, 1.5V≤V_{IN} -V_{OUT} ≤12V			0.2	%
		CJU1117B-1.8	I_{OUT}=10mA, 1.5V≤V_{IN} -V_{OUT} ≤10.2V			7	mV
		CJU1117B-2.5	I_{OUT}=10mA, 1.5V≤V_{IN} -V_{OUT} ≤9.5V			7	
		CJU1117B-3.3	I_{OUT}=10mA, 1.5V≤V_{IN} -V_{OUT} ≤8.7V			7	
		CJU1117B-5.0	I_{OUT}=10mA, 1.5V≤V_{IN} -V_{OUT} ≤7V			10	
Load Regulation	LDR	**CJU1117B-ADJ**	VI_N-V_{OUT}=1.5V, 10mA≤I_{OUT} ≤1A			0.4	%
		CJU1117B-1.8				7.2	mV
		CJU1117B-2.5				10	
		CJU1117B-3.3				13.2	
		CJU1117B-5.0				20	
Dropout Voltage	**V_D**		ΔV_{REF}=1%, I_{OUT}=1.0A		1.3	1.4	V
Adjust Pin Current	I_{Adj}	**CJU1117B-ADJ**	V_{IN}= 5V 10mA≤I_{OUT}≤0.8A		55	120	μA
Minimum Load Current	I_L		2.75V≤V_{IN} -V_{OUT} ≤12V (ADJ only)		2	7	mA
Quiescent Current	I_q		V_{IN}= 12V (ADJ except)		5	10	mA
Ripple Rejection	PSRR		f=10kHz, C_{OUT}=22μFTantalum, V_{IN}-V_{OUT}=3V, I_{OUT}=1A	60	70		dB
Temperature Stability					0.5		%
Long-Term Stability			T_A=125℃, 1000hrs		0.3		%
RMS Output Noise (% of VOUT)			T_A=25℃, 10Hz≤f ≤10kHz		0.003		%
Thermal Shutdown Hysteresis					25		℃


* With package soldering to copper area over backside ground plane or internal power plane $R_{\theta JA}$ can vary from 46 ℃/W to >90℃/W depending on mounting technique and the size of the copper area

FUNCTIONAL BLOCK DIAGRAM

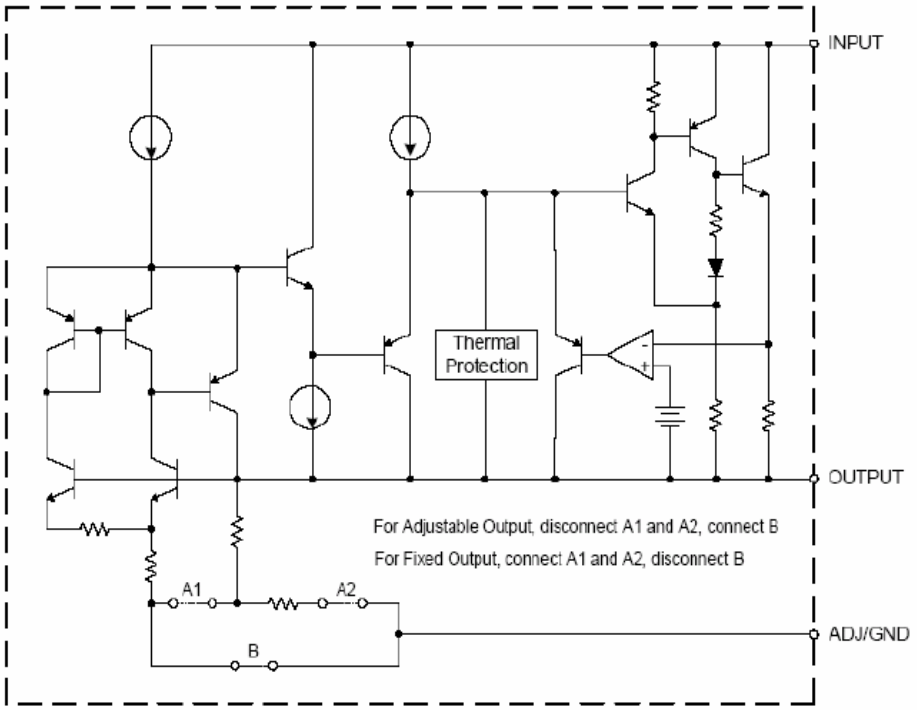


TYPICAL APPLICATION CIRCUIT

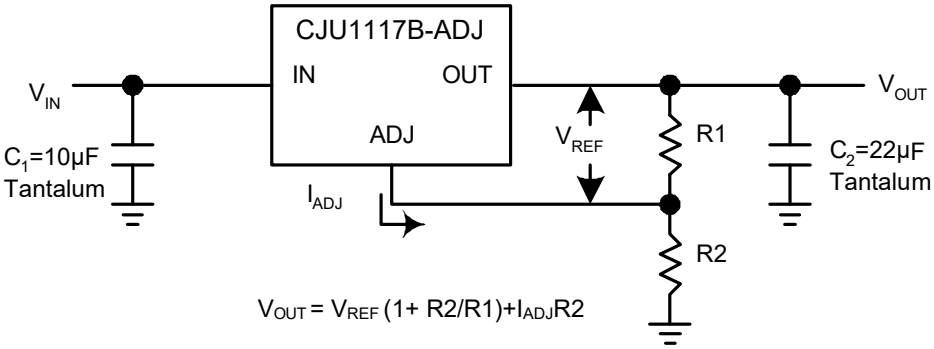

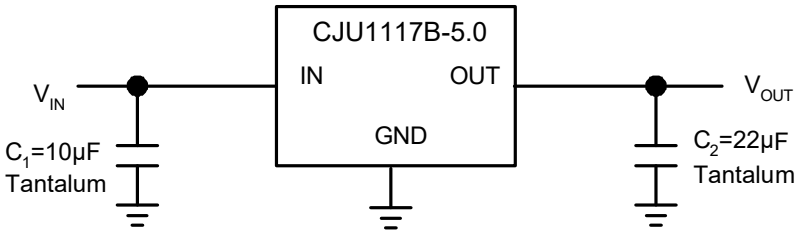


TYPICAL PERFORMANCE CHARACTERISTICS


Dropout Voltage vs. Output Current

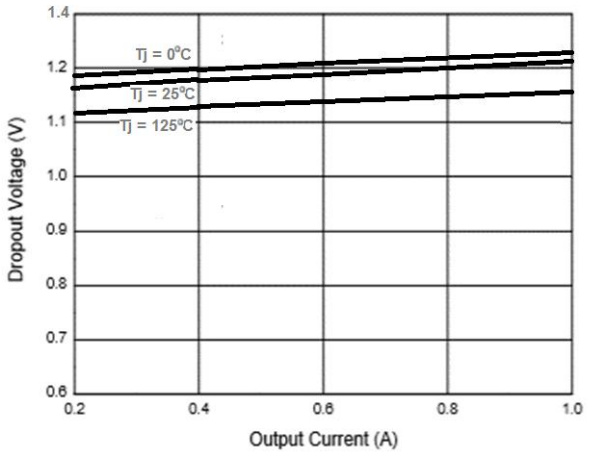


Dropout Voltage vs. Junction Temperature

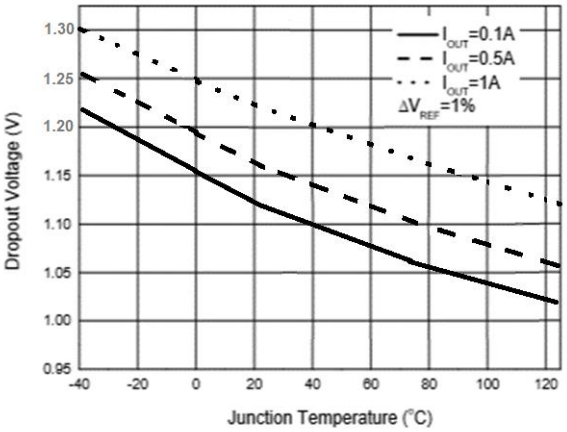


Load Regulation vs. Junction Temperature

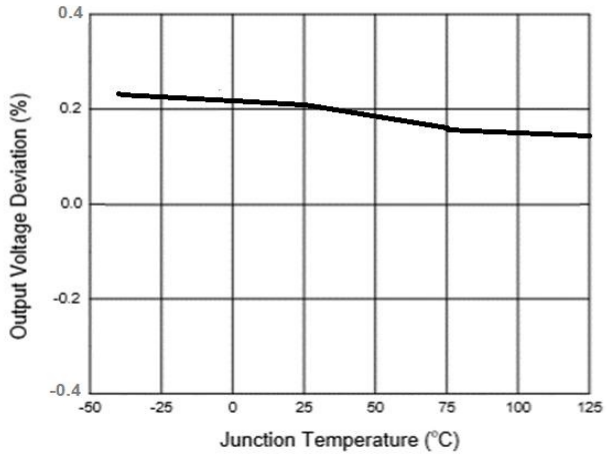


Reference Voltage vs. Junction Temperature

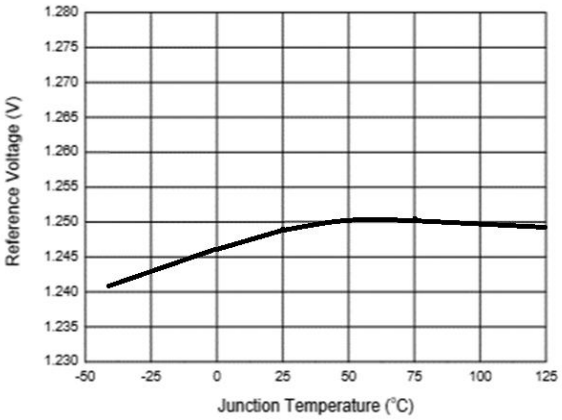

Output Voltage vs. Junction Temperature

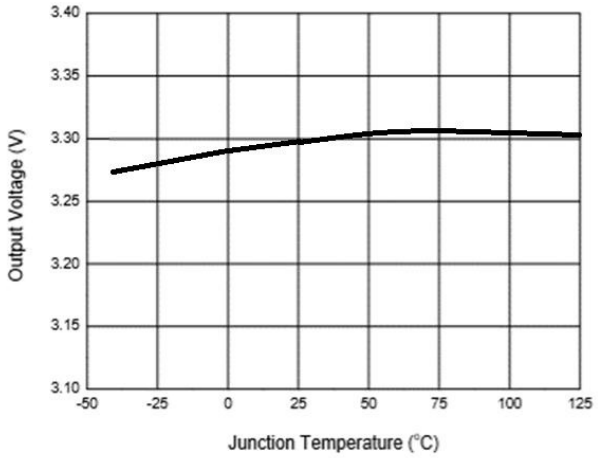


Minimum Load Current vs. Junction Temperature

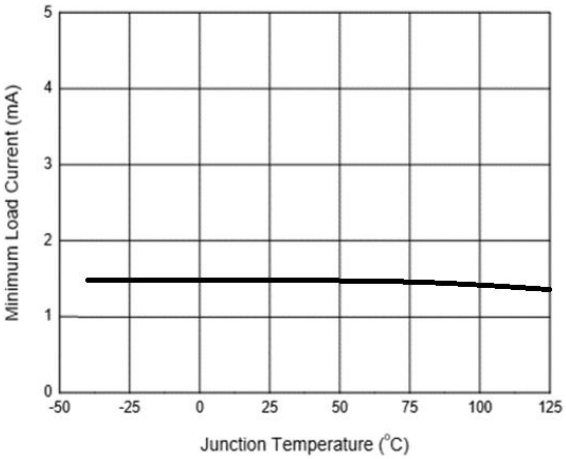


TYPICAL PERFORMANCE CHARACTERISTICS

Adjust Pin Current vs. Junction Temperature

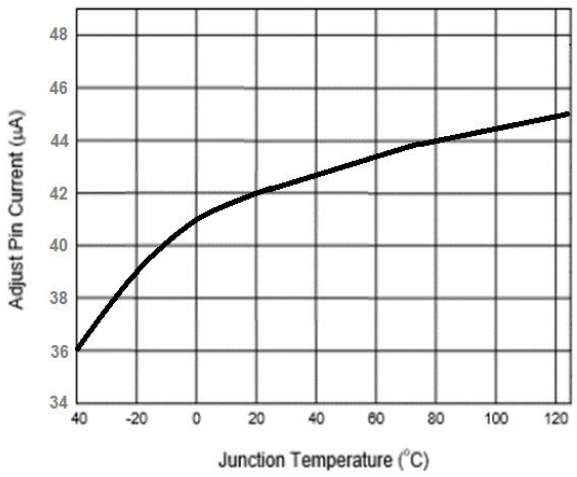


Short-circuit Current vs. Junction Temperature

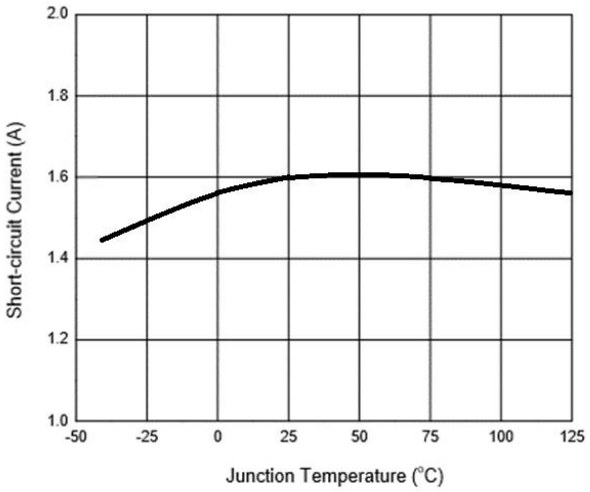


Ripple Rejection vs. Frequency

Vin=Vout+2.5 V, Iout=100mA, Cout=10uF

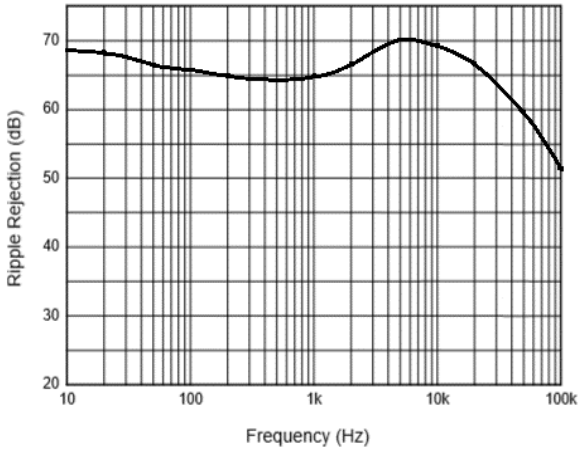


TO-252(4R)-2L Package Outline Dimensions

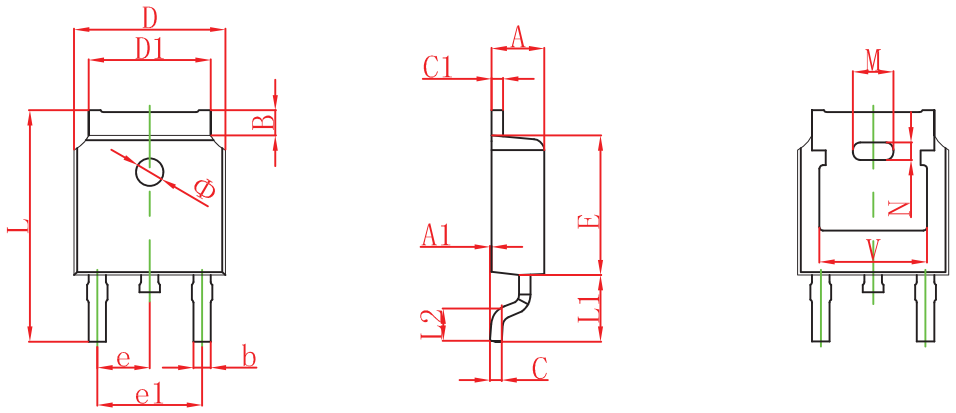

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.380	0.087	0.094
A1	0.000	0.100	0.000	0.004
B	0.800	1.400	0.031	0.055
b	0.710	0.810	0.028	0.032
c	0.460	0.560	0.018	0.022
c1	0.460	0.560	0.018	0.022
D	6.500	6.700	0.256	0.264
D1	5.130	5.460	0.202	0.215
E	6.000	6.200	0.236	0.244
e	2.286 TYP.		0.090 TYP.	
e1	4.327	4.727	0.170	0.186
M	1.778REF.		0.070REF.	
N	0.762REF.		0.018REF.	
L	9.800	10.400	0.386	0.409
L1	2.9REF.		0.114REF.	
L2	1.400	1.700	0.055	0.067
V	4.830 REF.		0.190 REF.	
Φ	1.100	1.300	0.043	0.051

TO-252(4R)-2L Suggested Pad Layout

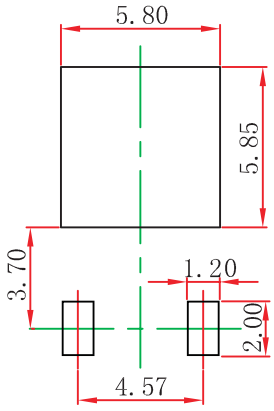


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

SZCJ reserves the right to make modifications,enhan nts,improvements,corrections or other es without further notice to any product herein. SZCJ does not assume any liability arising out of the application or use of any product described h

To-252(4R)-2L Tape and Reel

TO-252 Embossed Carrier Tape

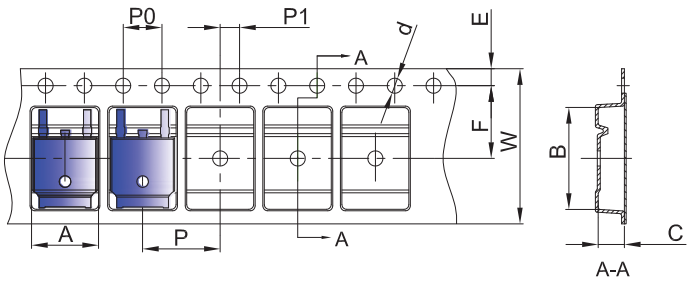


Packaging Description:


TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 25,00 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252 Tape Leader and Trailer

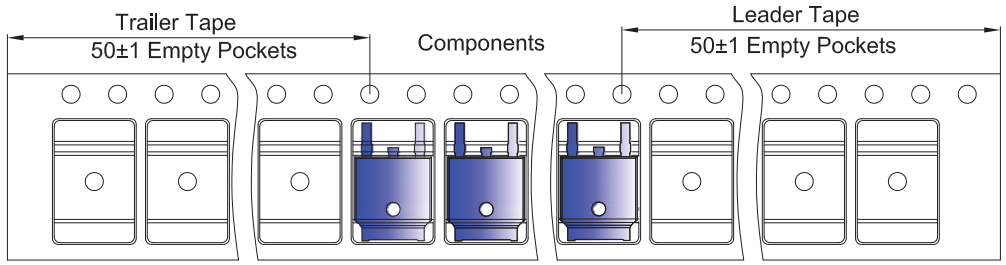

TO-252 Reel

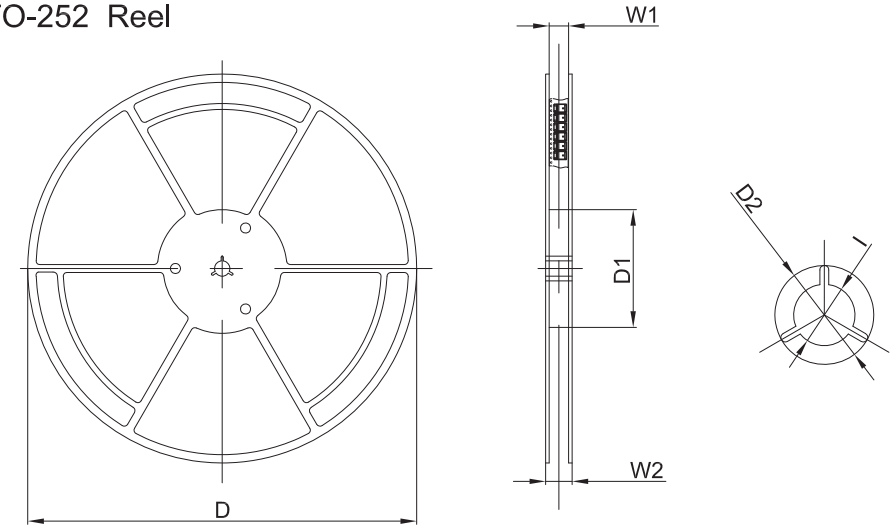

Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13"Dia	330.00	100.00	Ø21.00	16.40	21.00	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13inch	2,500 pcs	340×336×29	25,000 pcs	353×346×365	